


D1RFRD006






REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		Drawing Revise	Haoyh	02/27/06	
2		增加VDE、CE标志	LJH	11/16/07	

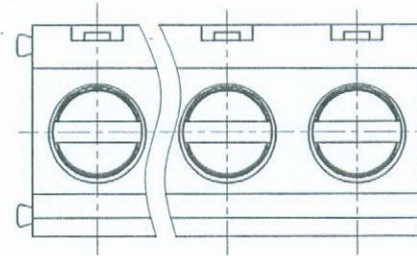

Notes:

1. pitch: 5.08mm poles:2-24P
2. Rated voltage/current:UL 300V/12A
VDE 250V/15A
3. Insulation resistance: 5000MΩ/DC1000V
4. Wrtstanding voltage: AC2000V/1Min
5. Wire range: 26-14AWG 1.5mm²
6. Temp. Range: -40° C~+105° C
7. Torque: M2.5 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	over	to	over	over	over	over	
6	6	10	30	30	60	100	150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

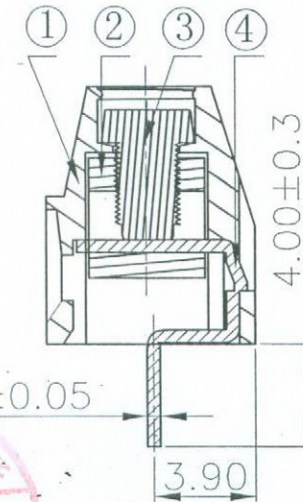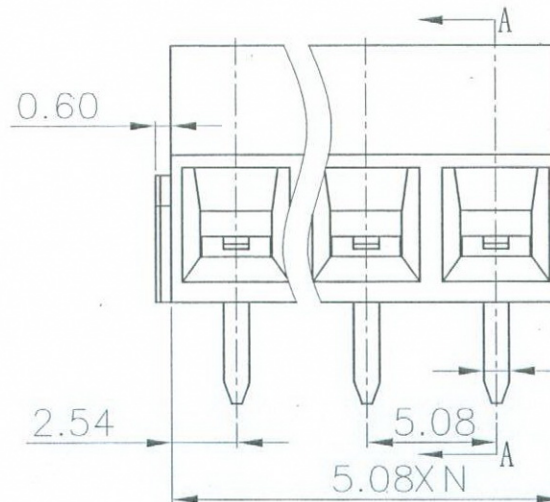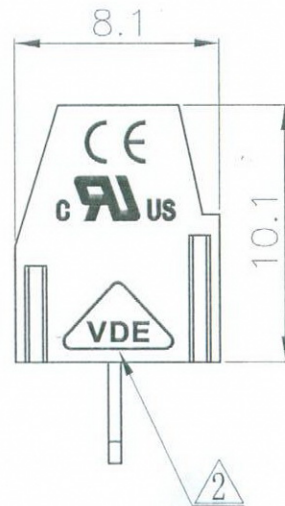

截面 A-A

1	DG127-5.08-Housing	4052A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG127 Pin header	4028B00010(H)	XX	Brass	SnCe
3	DG127"-Screws-M2.5	S000001450(H)	XX	Steel	Cr ³ Zn
2	DG127 Brass cage	X000000170(H)	XX	Brass	Ni plated

MM (INCH)	DATE 10/10/05
TOLERANCES EXCEPT AS NOTED	DATE 01/07/08
MM	DATE 01/10/08
ANGLES ± 1°	
THIRD ANGLE PROJECTION	

NAME	DG127-5.08-XXP-1Y-00A(H)
DRAWING NO.	DG127-5.08-E04
SIZE	A3
REV	T2
DO NOT SCALE DRAWING	
SHEET 1	OF 1