



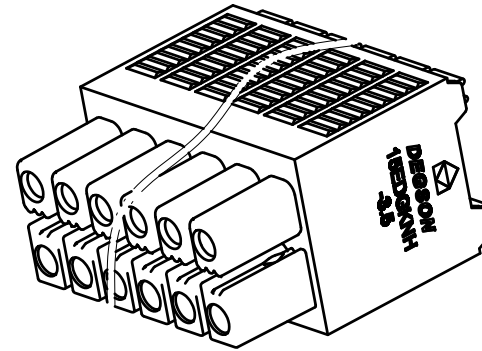

未注公差/General tolerances (mm)

|       |       |       |       |       |       |       |       |       |       |       |       |       |       |        |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0     | >3    | >6    | >10   | >18   | >30   | >50   | >80   | >120  | >180  | >250  | >315  | >400  | >500  | 0.1/10 |
| ~3    | ~6    | ~10   | ~18   | ~30   | ~50   | ~80   | ~120  | ~180  | ~250  | ~315  | ~400  | ~500  | ~2.50 | ±2°    |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 |        |

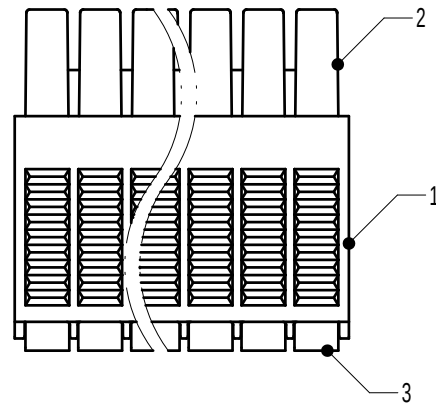




Note:

The A&amp;Z(H) in the name means: A(H) and Z(H).

|      |              |                 |           |
|------|--------------|-----------------|-----------|
| 5    | Spring       | Stainless steel | /         |
| 4    | Clamp        | Copper alloy    | Sn Plated |
| 3    | Button       | POM             | UL94HB    |
| 2    | Cover        | PA66            | UL94V-0   |
| 1    | Housing      | PA66            | UL94V-0   |
| ITEM | NAME OF PART | MATERIAL        | NOTES     |

|                                                     |                 |         |         |
|-----------------------------------------------------|-----------------|---------|---------|
| UL 标准/UL Standard:                                  | B               | C       | D       |
| 额定电压/电流/Rated Voltage(V)/Current(A)                 | 300/8           | 50/8    | /       |
| IEC 标准/IEC Standard:                                |                 |         |         |
| 过压类别/Overvoltage Category/污染等级/Pollution Degree     | III/3           | III/2   | II/2    |
| 额定电压/电流/Rated Voltage(V)/Current(A)                 | 200/9.5         | 250/9.5 | 320/9.5 |
| 额定脉冲电压(KV)/Rate Impulse Voltage(KV)                 | 2.5             | 2.5     | 2.5     |
| 螺丝扭矩/Torque Tightening(N·m/Lb.in)                   | /               |         |         |
| 线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²) | 26~16 / 0.2~1.5 |         |         |
| 间距/Pitch(mm)/线数范围/Poles                             | 3.5/N=04~48P    |         |         |
| 剥线长度/Stripping length(mm)                           | 10              |         |         |
| 使用温度范围/Operating temperature(°C)                    | -40~+105        |         |         |
| 符合RoHS环保要求/Conform to RoHS                          | Yes             |         |         |
| 标准颜色编号/Standard color number: PANTONE / RAL         | /               |         |         |

|                     |                                |                  |                |       |       |
|---------------------|--------------------------------|------------------|----------------|-------|-------|
| MATERIAL:           |                                | SURFACE/COLOR:   |                |       |       |
| MAT NO./REV: - / 00 |                                | MAT STATUS: 批量   |                |       |       |
| 16                  | NAME                           |                  |                |       |       |
| 16                  | 15EDGKNH-3. 5-XXP-1Y-00A&Z (H) |                  |                |       |       |
| 15                  | DRAWING NO.                    | TYPE             | DRAWING STATUS | SCALE | SHEET |
| 15                  | 200098349                      | CUSTOMER DRAWING | 已发布            | 2:1   | 1/1   |

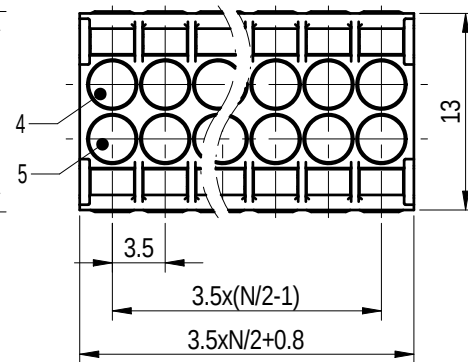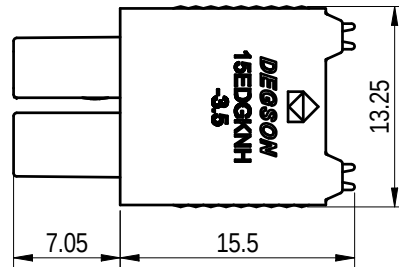

|     |     |             |      |            |
|-----|-----|-------------|------|------------|
| 00  |     |             | 胡松   | 2022.08.15 |
| REV | ECN | DESCRIPTION | DRFT | DATE       |