


公差/General tolerances(mm)														0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'






6-10P



11-24P



11-24P

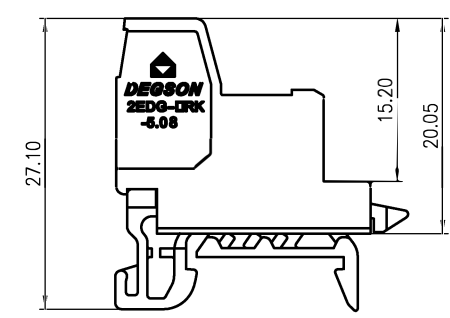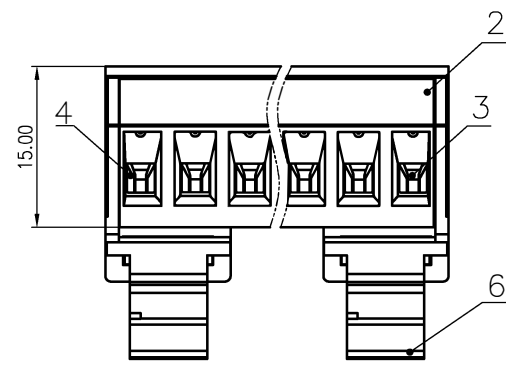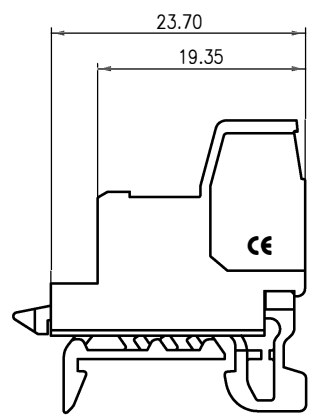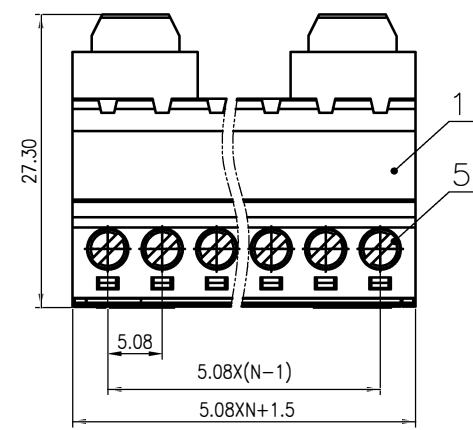

6	Housing 2	PA66	UL94V-0
5	Screw	Steel	M3/Zn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Pin header	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
线数范围/Poles		N=06~24P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

文 管 中 心
研 发 专 用
2020. 05. 18
(仅限内部使用, 对外无效)

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NAME:	2EDG-VRK-5.08-XXP-1Y-00A(H)
STATUS:	/	DRAWING NO.:	2EDG-VRK-5.08-C01
APPD: Lan ChH 2020.05.18		REV	T1
CHKD: /		TYPE:	CUSTOMER DRAWING
DRFT: chenZh 2018.08.29		SCALE:	2:1
REV	ECN	DESCRIPTION	DRFT
DATE	SIZE: A3	TYPE:	CUSTOMER DRAWING
DATE	SIZE: A3	TYPE:	CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRFT	DATE