


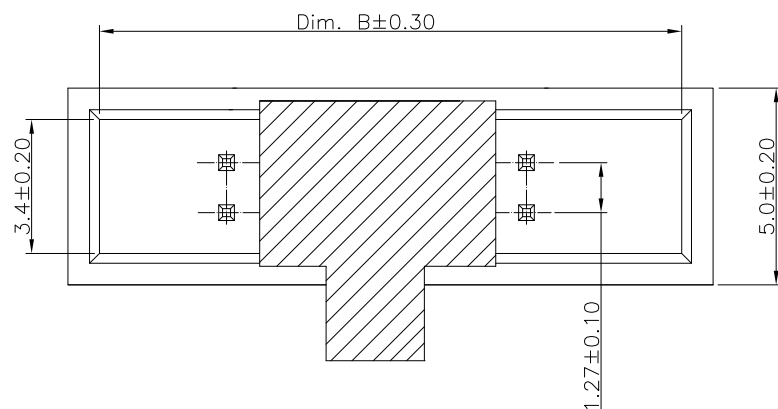

No. Pin	Dim. A	Dim.B	Dim.C
8	11.43	9.83	3.81
10	12.70	11.10	5.08
12	13.97	12.37	6.35
14	15.24	13.64	7.62
16	16.51	14.91	8.89
20	19.05	17.45	11.43
24	21.59	19.99	13.97
26	22.86	21.26	15.24
30	25.40	23.80	17.78
34	27.94	26.34	20.32
40	31.75	30.15	24.13
44	34.29	32.69	26.67
50	38.10	36.50	30.48
60	44.45	42.85	36.83
68	49.53	47.93	41.91

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:50V AC/DC

Contact Resistance:20m ohm .Max

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic(LCP UL94V-0)

Insulator Color:Black

Terminal:Brass

Plating:Gold Plated Over Nickel.

How To Order

2195SM-XXX-CR

Cap+Reel




G:Gold Plated

T:Tin Plated

SG>Selective Gold Plated


No. Of Contacts

SMD Type

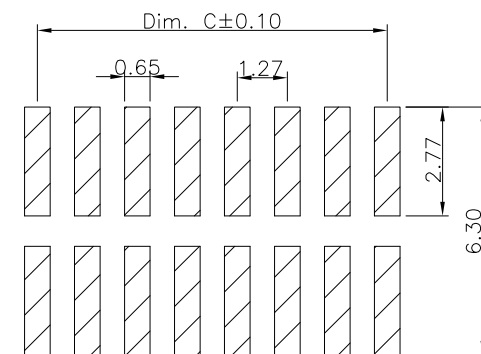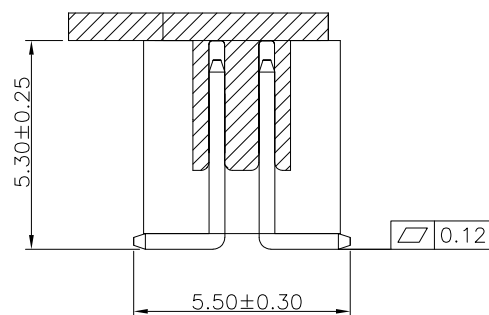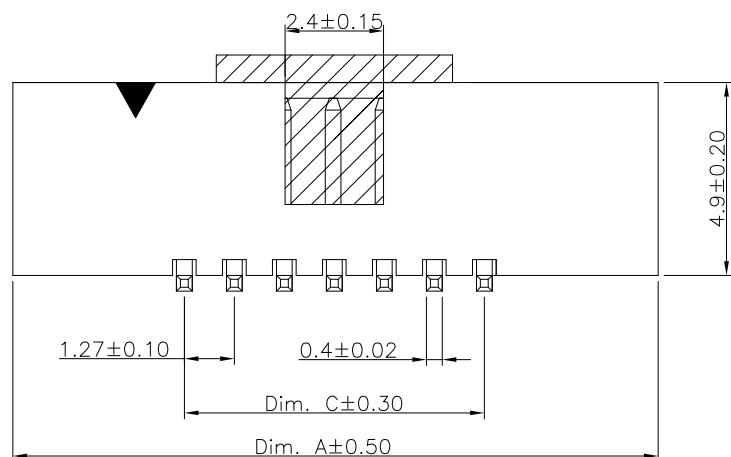

P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Jack Huang	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 1.27 Pitch Box Header SMT Type	
C				Jerry Chen	SCALE: 1:1		
B				APPROVAL:	SHEET: 1 / 1	PART NO: 2195SM-XXX-CR	
A	19-Dec-2018		Jack Huang	Mike Wu	PROJECTION: 		
REV	DATE	FILE	BY				SIZE A4