

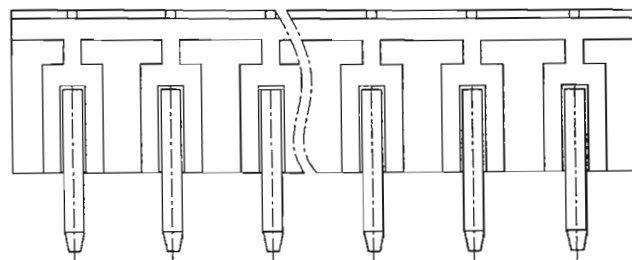
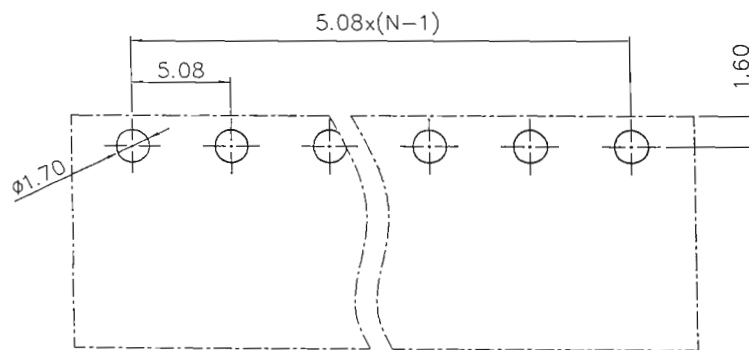


D1RFRD006

active

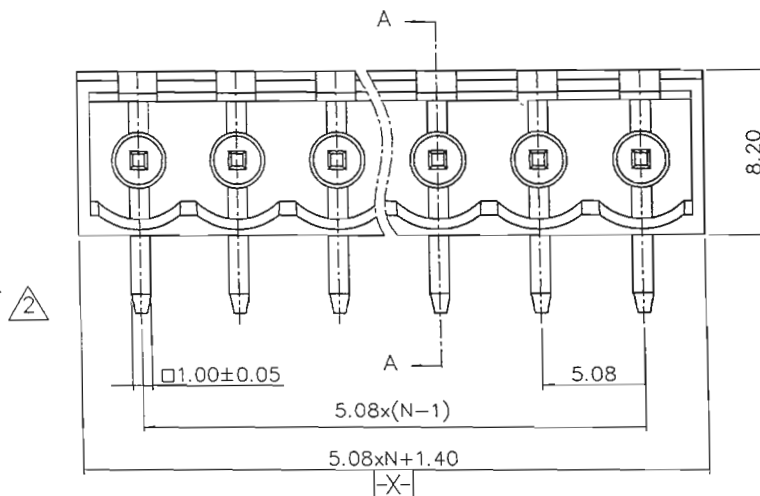


VIEW B




P.C.B LAYOUT

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
①		Drawing emend	CSX	04/21/06
②		增加VDE、CE刻字	YeJ	02/27/08
③		图面更新	YeJ	03/28/08
④		增加自动化方针	WLM	09/23/08
⑤	10-0329	增加标注尺寸	COCO	10/04/10
⑥	14-0107	黄铜变紫铜, 料号变更; 工频耐压变更为额定冲击电压	WL	06/26/14

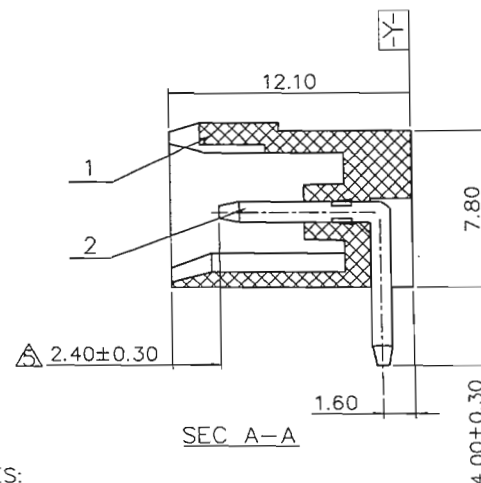

SEC A-A



NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.08MM, POLES: 2-24P
- 3.RATED VOLTAGE/CURRENT: UL 300V/15A VDE 320V/20A
- 4.OPERATION TEMPERATURES: -40°C~+105°C
- 5.RATED IMPULSE VOLTAGE: 4.0KV
- 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
- 7.UNDIMENSIONED TOLERANCES:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	10	10	24	30	60	100	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

⑤	2	2EDGR-Pin header Automatic assembly	1008B00340(H)	XX	COPPER	SN PLATED
⑥	2	2EDGR(A)Pin header Manual assembly	1008B00330(H)	XX	COPPER	SN PLATED
	1	2EDGRC-5.08-Housing	1009A0YXXA(H)	1	PA66	UL94V-0
ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

MM (INCH)		MATERIAL:		FINISH:	
TOLERANCES EXCEPT AS NOTED		PART NO.:		NAME:	
.X ±	.X' ±	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		2EDGRC-5.08-XXP-1Y-00A(H)	
.XX ±	.XX' ±				
.XXX ±	.XXX' ±				
ANGLES ± 1°		APPD: <i>Axon 12/18/14</i>		TITLE: ASSEMBLY DRAWING	
THIRD ANGLE PROJECTION		CHKD: <i>Lim 12/18/14</i>		DRAWING NO.: 2EDGRC-5.08-E06	
		DRFT: HW 08/23/05		REV T6	
		DO NOT SCALE DRAWING		SCALE N/A	
				SHEET 1/1	