

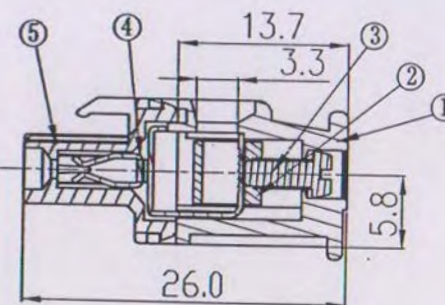
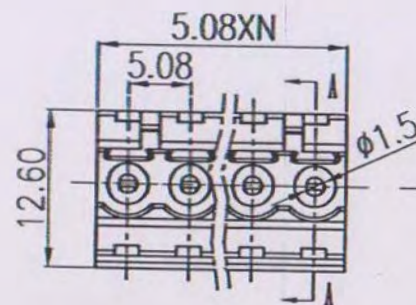
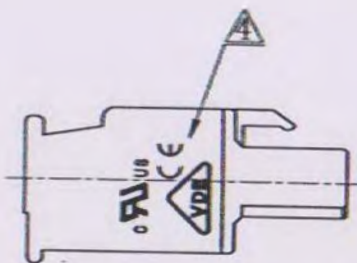


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		Drawing emend	CSX	04/18/06	
△		工程变更	CSX	11/30/06	
△		增加UL刻字	CSX	03/12/07	
△		增加VDE、CE刻字	WLM	02/10/09	
△	11-0184	盖板上增加间距刻字	lasting	07/12/11	

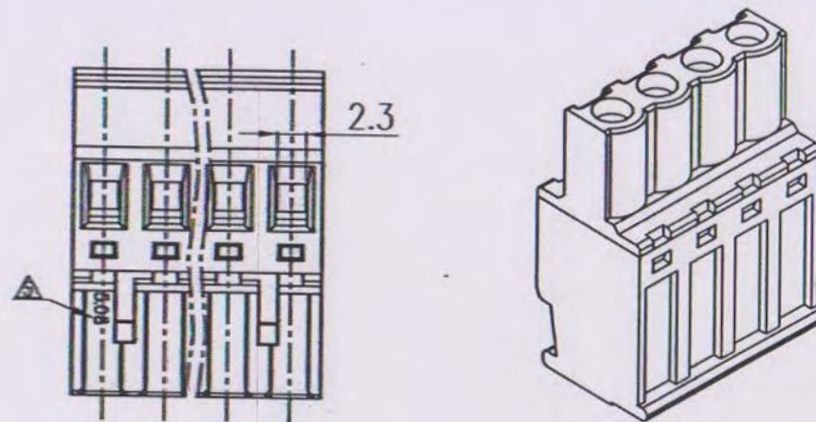

Section B-B

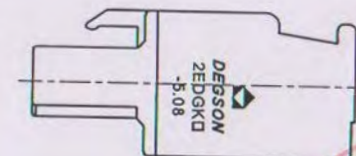

Notes:

1. Pitch: 5.08mm, Poles: 2-24P
2. Rated voltage/current: UL 300V/15A
VDE 320V/10A
3. Operation temperatures: -45°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000Ω/DC1000V
6. Wire Range: 28~12AWG, 2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
5	6 to 10	30	30 to 60	60	60 to 100	100	100 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	mm

5	2EDGKA/B-5.08 (H) COVER	1028C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phospor Bronze	Ni plated
3	2EDG "—" SCREW-M2.5	S000000980 △	XX	Stell	Cr ³⁺ Zn
2	DG128 CAGE	X000000020 (H)	XX	Brass	Ni plated

1 2EDGKA/B-5.08 (H) HOUSING		1028A0YXXA (H)		1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES	
MM (INCH) TOLERANCES EXCEPT AS NOTED DETACHED LIST ANGLES ± 1° THIRD ANGLE PROJECTION		DFTO HW CHKD MFO DATE 10/06/05 DATE 7/14/11 DATE 07/14/11 APPVL Hang MATERIAL: G.E.: FINISH: SCALE:	NAME 2EDGKA-5.08-XXP-1Y-00A(H) DRAWING NO. 2EDGKA-5.08-E03 PART NO. DO NOT SCALE DRAWING			
		DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD SIZE A3 REV T5 07/13/11 SHEET 1 OF 1				