

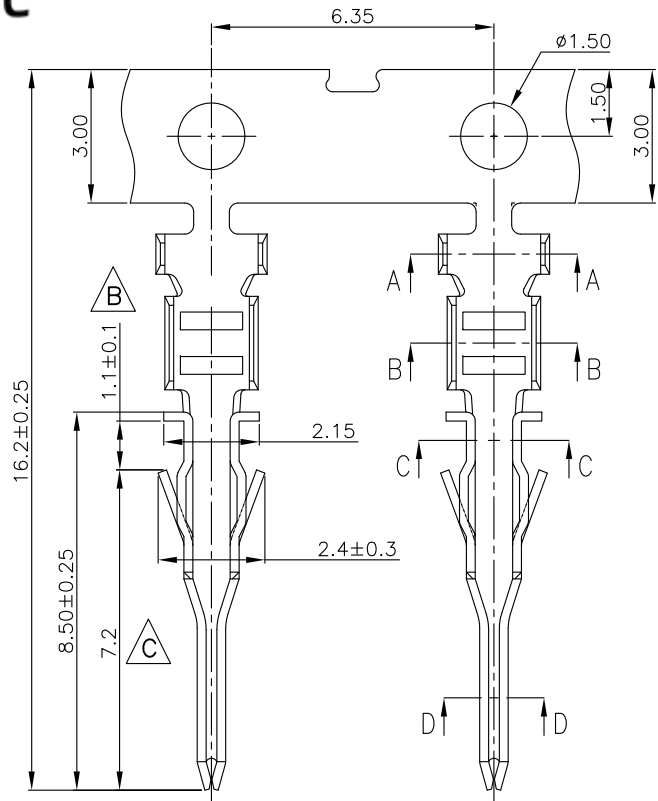



A-A





B-B



C-C



D-D

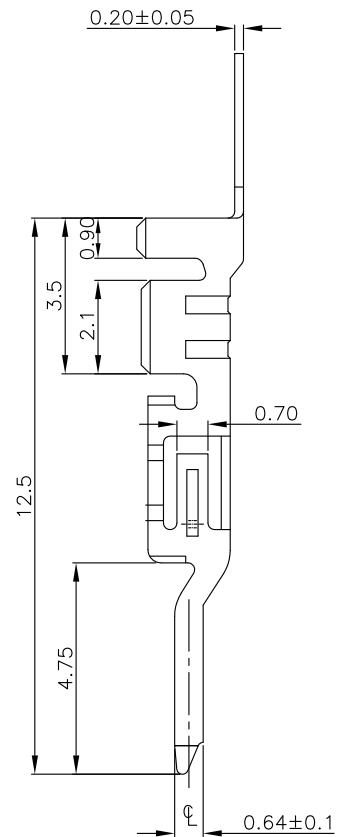

Specifications:

Current Rating: 5.0A AC/DC #22AWG
Voltage Rating: 250V AC/DC
Contact Resistance: 10m ohm. max.
Withstanding Voltage: 1,500V AC/minute
Operating Temperature Range: -25°C ~ +85°C
Application Wires: AWG 20-24 or 26-30
Insulation O.D: AWG 20~24 1.85mm(Max)
AWG 26~30 1.27mm(Max)

Mates With 5561 Series Housing

Material and Finish

Contact: Phosphor Bronze

Finish: Tin Plated

Packing: 10,000 pcs/Reel

How To Order

5561TX-XX-XXXX

Blank: WIRE SIZE 20-24
2630: WIRE SIZE 26-30

Blank: Phosphor Bronze
BS: Brass

Blank: Tin Plated
G: Gold Plated

SG: Selective gold plated
SG30: Selective gold plated 30u"

T: Terminal



WIRE SIZE	A	B	C	D
20-24	2.4	2.5	2.0	2.1
26-30	1.91	2.10	1.47	1.65

RoHS Compliant

				DRAWN: Blake Huang	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E				CHECKED: Jerry Chen		UNIT: mm	DESCRIPTION: 3.0mm Wire To Wire Terminal
D					APPROVAL: Mike Wu	SCALE:	
C	13-May-2016	ECN-TW1605007	Blake Huang	SHEET: 1 / 1			
B	13-Jul-2015	ECN-TW1506001	Miller Yu	PROJECTION: 			
A	04-DEC-2013		Dennis Lin				
REV	DATE	FILE	BY				