


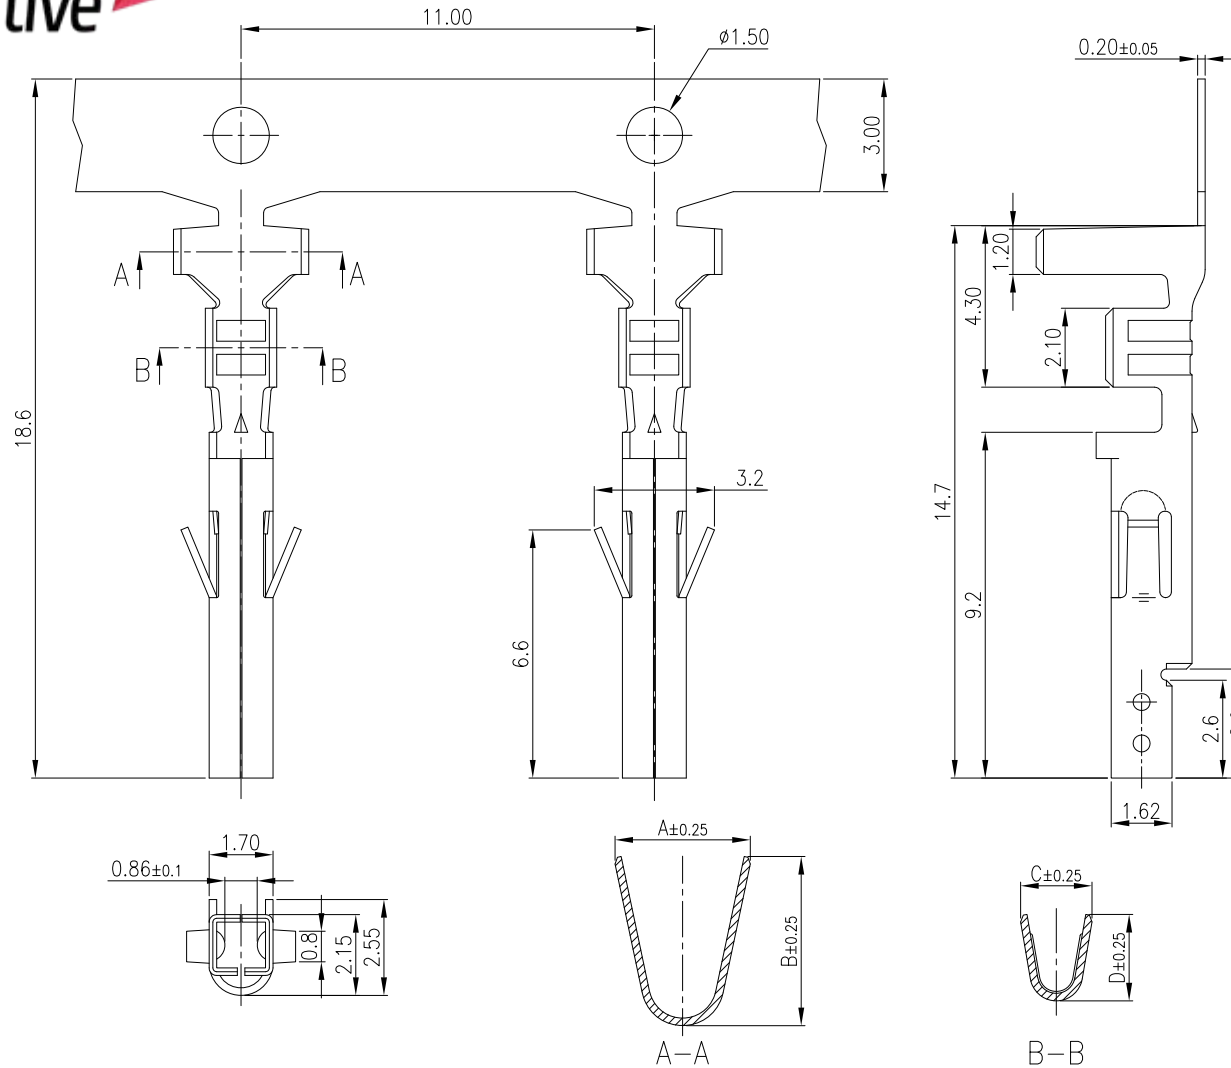

Specifications:

Current Rating:9.0 AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m ohm. max.
Withstanding Voltage:1,500V AC/minute
Operating Temperature Range:-40°C~+105°C
Application Wires:AWG16 to 26
Mates With 2257 Series Housing

Material and Finish

Contact:Brass or Phosphor Bronze
Finish:Tin Plated

How To Order

2257TX-XXXX-XX-XX

Blank:With Plated
RM:W/O Plating
BS:Brass
PH:Phosphor Bronze
16:Apply Wire 16#
1824:Apply Wire 18# To 24#
2228:Apply Wire 22# To 28#
Blank:Tin Plated
G:Gold Plated
T:Terminal

Part No	Wire Apply	A	B	C	D	Q'ty/Reel
2257T-16	16AWG	3.6	4.5	2.3	2.7	4,000Pcs
2257T-1824	18-24AWG	3.6	4.5	1.9	2.3	4,000Pcs
2257T-2228	22-28AWG	2.3	2.3	1.8	1.65	5,000Pcs

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Art	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 4.2mm Plug Crimp Terminal	
C	01-DEC-2010	Amend Stru.	Art		SCALE: 1:1		
B	24-NOV-2009	Amend dim.	Art	APPROVAL:	SHEET: 1 / 2	PART NO: 2257TX-XXXX-XX-XX	
A	09-DEC-2008		Art		PROJECTION:		
REV	DATE	FILE	BY	Mike Wu			

A4


1

2

3

4

5

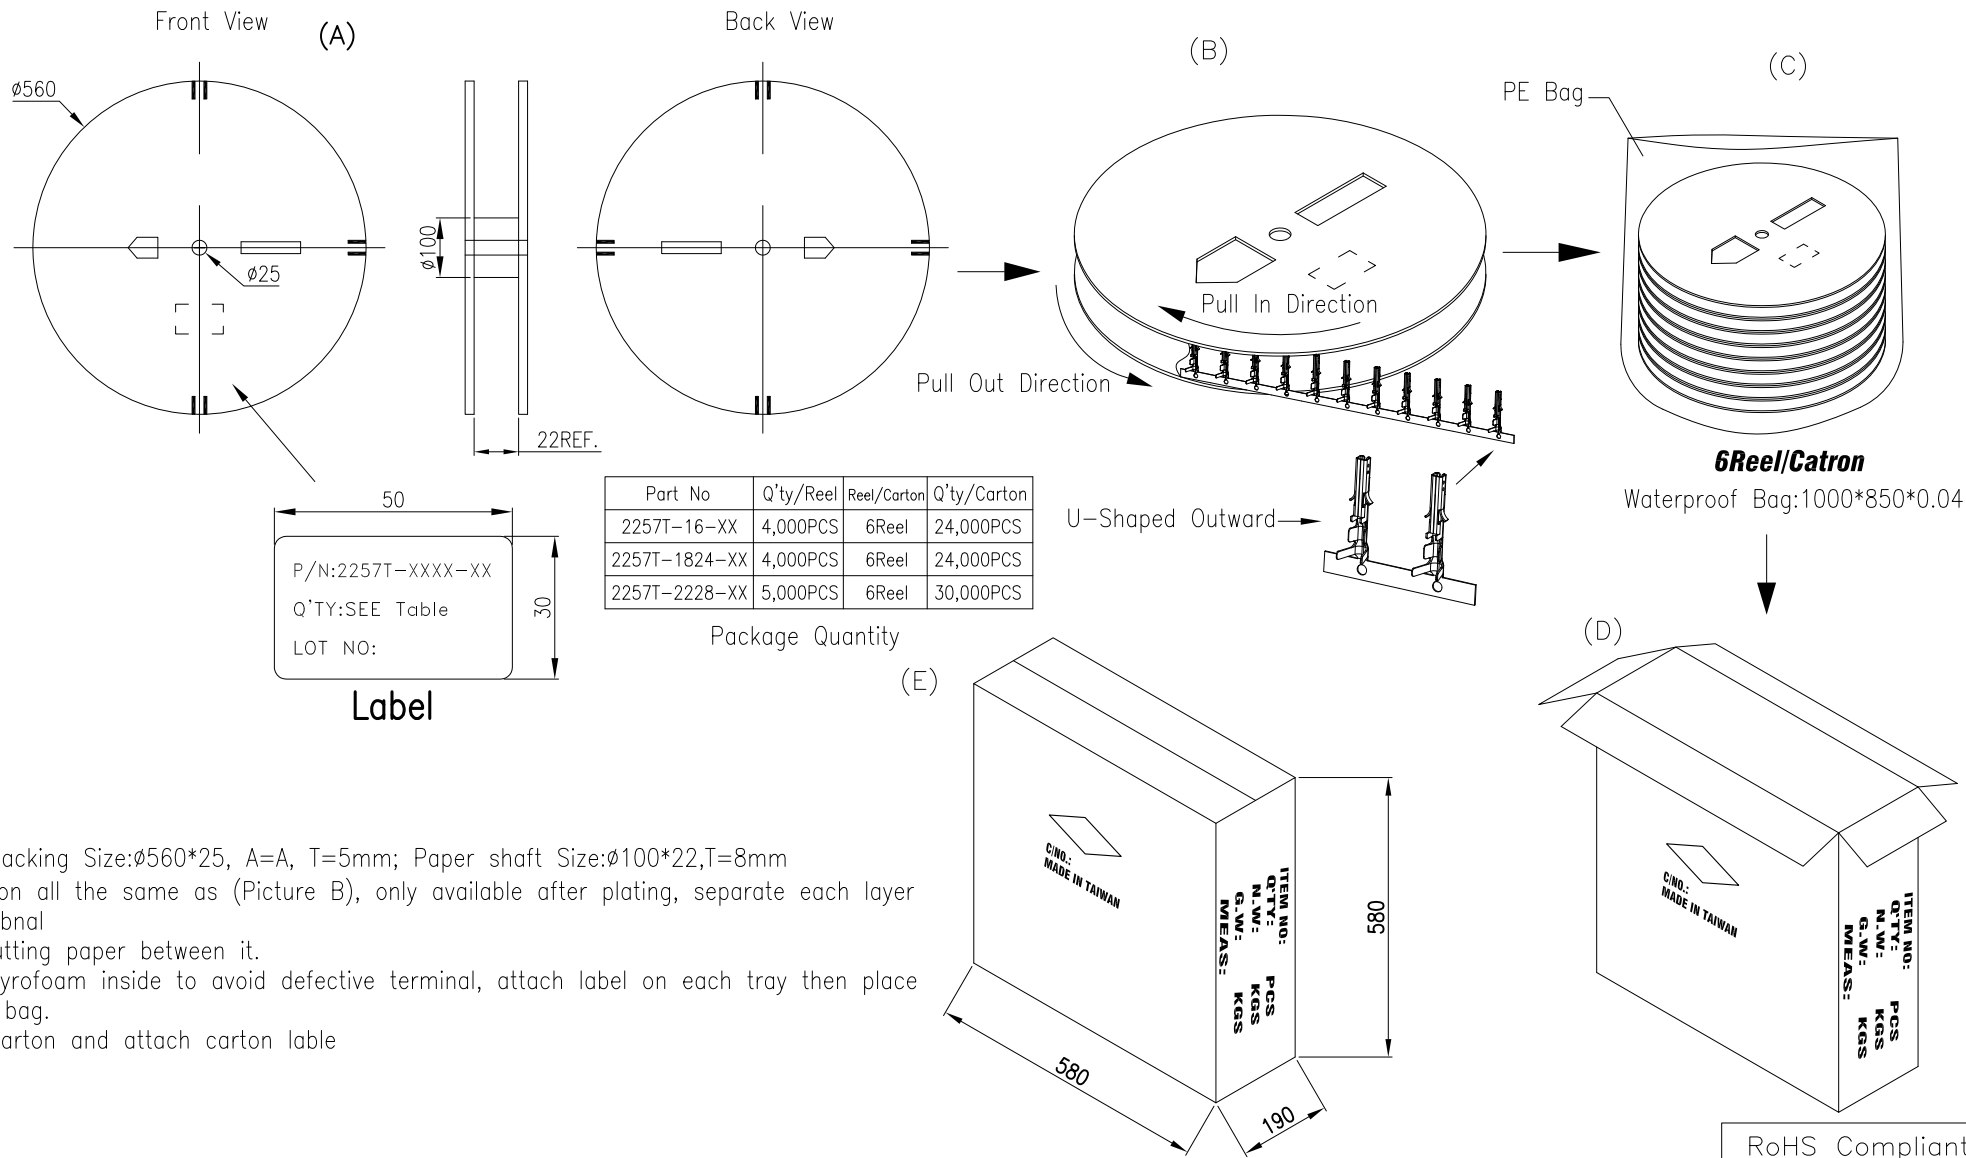

F				DRAWN:	GENERAL TOLERANCE:	Neltron Connectors Neltron Industrial Co., Ltd.	
E				Art	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	01-DEC-2010	Amend Stru.	Art		SCALE: 1:1	4.2mm Plug Crimp Terminal	A4
B	24-NOV-2009	Amend dim.	Art		SHEET: 2 / 2	PART NO:	
A	09-DEC-2008		Art	APPROVAL:	PROJECTION:	2257TX-XXXX-XX-XX	
REV	DATE	FILE	BY	Mike Wu			