

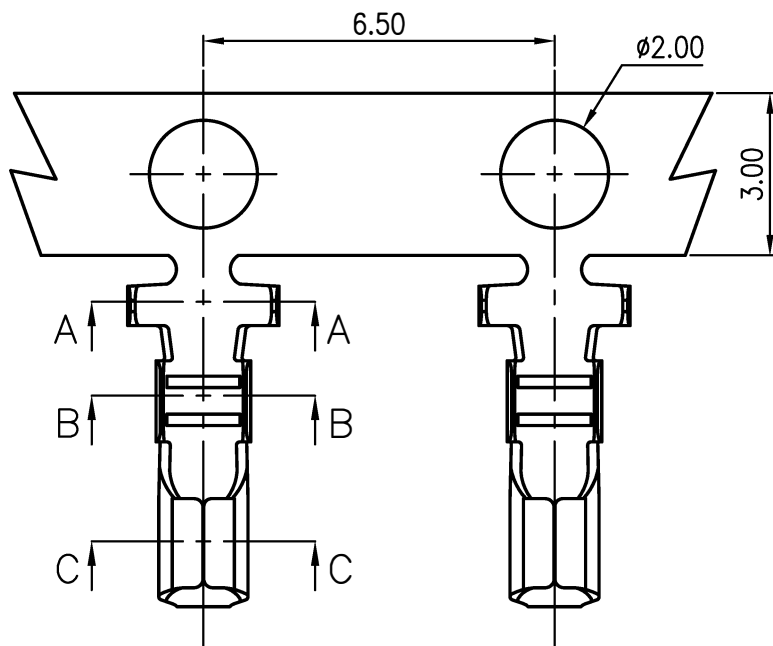




Section:A-A



Section:B-B

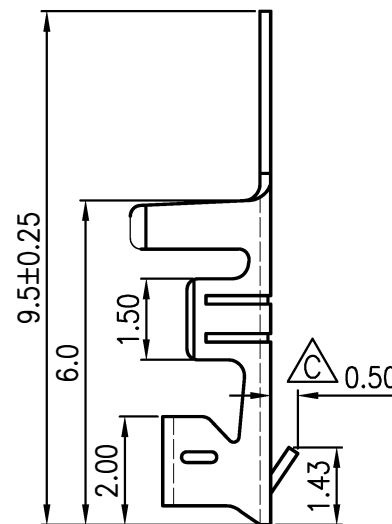

Section:C-C



active

Specifications:

Current Rating:2.5A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. max.
Withstanding Voltage:800V AC/minute
Operating Temperature Range:-25°C~+85°C
Application Wires:AWG22# to 30#
Insulation O.D.: ϕ 1.5mm max.
Mates With 2318HEH Series Housing
Material and Finish
Contact:Phosphor Bronze or Brass
Finish:Tin Plated
Packing:10,000pcs/Reel

How To Order

2318TEH-XX

Blank:Phosphor Bronze
BS:Brass
T:Terminal

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Art	.X=±0.2 .XX=±0.15 .XXX=±0.10		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	29-APR-2010	Amend Dim.	Art		SCALE: 1:1	2.5mm Wire To Board Housing Terminal	A4
B	07-JAN-2009	Amend Part No.	Art		SHEET: 1/1	PART NO:	
A	11-APR-2008		Art	APPROVAL:	PROJECTION:	2318TEH-XX	
REV	DATE	FILE	BY	Mike Wu			