
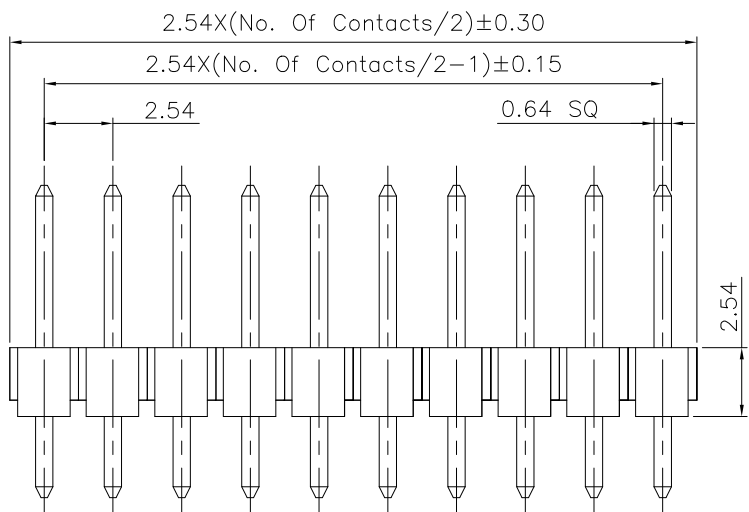
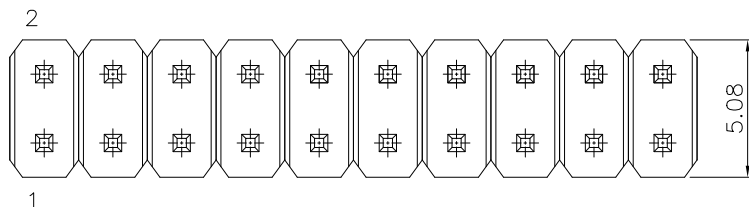


Specifications:
Current rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm Max
Insulation Resistance:1000M ohm Min
Withstanding Voltage:600V AC For one Minute
Operating Temperature Range:-40°C To +105°C

Materials and Finish
Insulator:PBT(UL94V-0)
Insulator Color:Black
Contact:Copper Alloy
Plating:Gold/Bright Tin/Matte Tin/Selective Gold Plated

How To Order
2213S-XXX

G:Gold Plated
 T:Bright Tin Plated
 MT:Matte Tin Plated
 SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.
No. Of Contacts
Straight

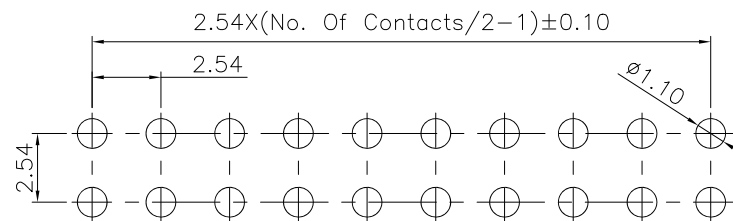

P.C.B. Layout

RoHS Compliant

F				DRAWN: Allen	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Row Straight Type	SIZE A4	
C					SCALE: 1:1			
B	11—JAN—2024	Add Plated Option	Jamie	APPROVAL: Mike Wu	SHEET: 1/1	PART NO: 2213S—XXX		
A	01—JUN—2009		Allen					
REV	DATE	FILE	BY		PROJECTION: 