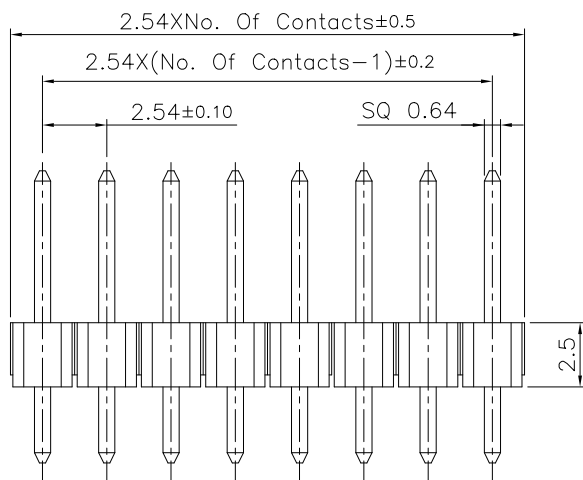


Specifications

Current Rating:3.0A AC/DC

Voltage Rating:500V AC/DC $\triangle B$

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. Min.

Withstanding Voltage:500V AC For One Minute $\triangle B$

Operating Temperature Range:-25°C To +105°C $\triangle B$

Material and Plated

Insulator:PBT (UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

$\triangle C$ Plated:Gold Plated/Tin Plated/SG:Selective Gold Plated

SG15:Selective Gold Plated 15u"

SG30:Selective Gold Plated 30u"

How To Order

2211S-XXX

G:Gold Plated

T:Tin Plated $\triangle C$

$\triangle D$ MT:Matte Tin Plated


SG>Contact Area Gold Plated,
Solder Tail Matte Tin Plated.

SG15>Contact Area 15u" Gold Plated,
Solder Tail Matte Tin Plated.

SG30>Contact Area 30u" Gold Plated,
Solder Tail Matte Tin Plated.


No. Of Contacts

Straight Type

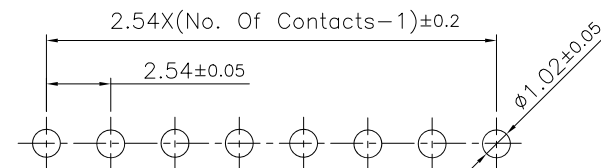

P.C.B Layout

RoHS Compliant

F				DRAWN: Romina Wu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
E								
D	18-DEC-2023	Add Matte Tin Plated	Lisy Liu	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Single Row Straight Type		SIZE A4
C	28-JUN-2019	Add Tin Plated	Jerry Chen		SCALE: 1:1			
B	14-JAN-2019	Update drawing	Romina Wu	APPROVAL: Mike Wu	SHEET: 1/1	PART NO: 2211S-XXX		
A	25-OCT-2018		Romina Wu		PROJECTION: 			
REV	DATE	FILE	BY					