
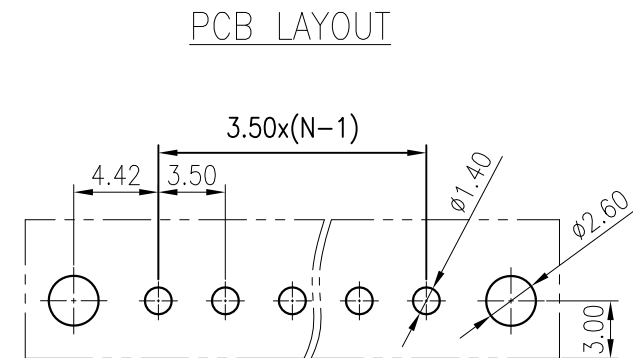
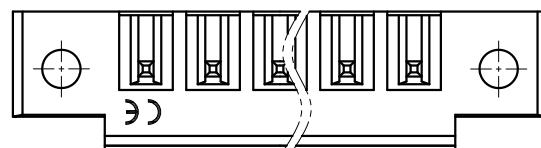
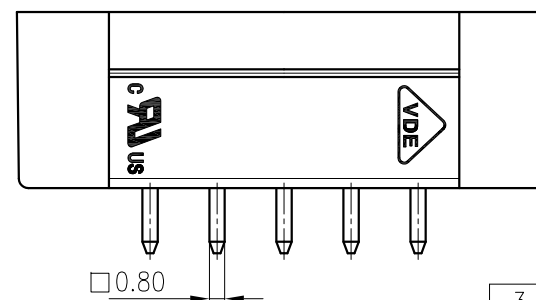




3	Screw cap	Copper alloy	M2.5
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			B
额定电压/电流/Rated Voltage(V)/Current(A)			300/8
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree			II/2
额定电压/电流/Rated Voltage(V)/Current(A)			250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			2.5
间距/Pitch(mm)/线数范围/Poles			3.50/N=02~22P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL:		SURFACE:	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Lan ChH 2020.06.02			
CHKD: /			
NAME:		15EDGVM-3.5-XXP-1Y-00A(H)	
DRFT: Yz 2015.10.13		DRAWING NO.: 15EDGVM-3.5-C01	
 SIZE: A4 		TYPE: CUSTOMER DRAWING SCALE: 2.5:1 SHEET	
		T1 1/1	

T2		Change the drawing and tolerance table	Yu JZh	2020.06.02
REV	ECN	DESCRIPTION	DRFT	DATE