


PRIMARY CHARACTERISTICS	
$P_{PP}@10/1000 \mu s$	1000W
V_{RWM}	5~58V
$T_J \text{ Max}$	150°C

- ### FEATURES
- GLASS PASSINATED CHIP
 - 1000 W PEAK PULSE POWER CAPABILITY WITH A10/1000 μs WAVEFORM, REPETITIVE RATE (dutycycle):0.01 %
 - LOW LEAKAGE
 - UNI AND BIDIRECTIONAL UNIT
 - EXCELLENT CLAMPING CAPABILITY
 - VERY FAST RESPONSE TIME
 - RoHS COMPLIANT

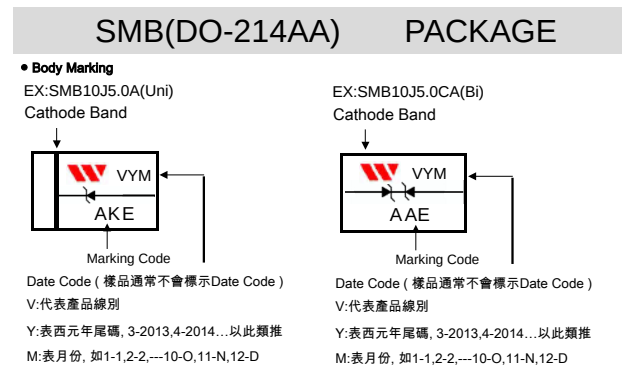

- ### MECHANICAL DATA
- CASE: MOLDED PLASTIC
 - EPOXY: UL 94V-0 RATE FLAME RETARDANT
 - LEAD: SOLDERABLE PER MIL-STD-750, METHOD2026
 - POLARITY: COLOR BAND DENOTES CATHODE ENDEXCEPT BIPOLAR
 - MOUNTING POSITION: Any

Maximum Ratings($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	UNIT
Peak power dissipation with a 10/1000 μs waveform ⁽¹⁾	P_{PP}	1000	W
Peak pulse current with a 10/1000 μs waveform ⁽¹⁾	I_{PP}	See Next Table	A
Power dissipation on infinite heatsink at $T_L = 75^\circ C$	P_D	5.0	W
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾	I_{FSM}	100	A
Maximum instantaneous forward voltage at 25 A for unidirectional only ⁽³⁾	V_F	3.5/5.0	V
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	°C

Note:

(1)Non-repetitive current pulse per Fig.5 and derated above $T_A = 25^\circ C$ per Fig.1

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(3) $V_F < 3.5V$ for devices of $V_{BR} < 50V$.



Ratings and Characteristics Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

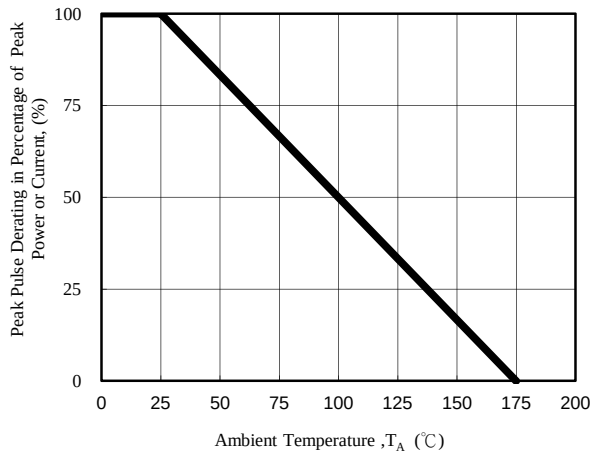


Fig. 1 - Pulse Derating Curve

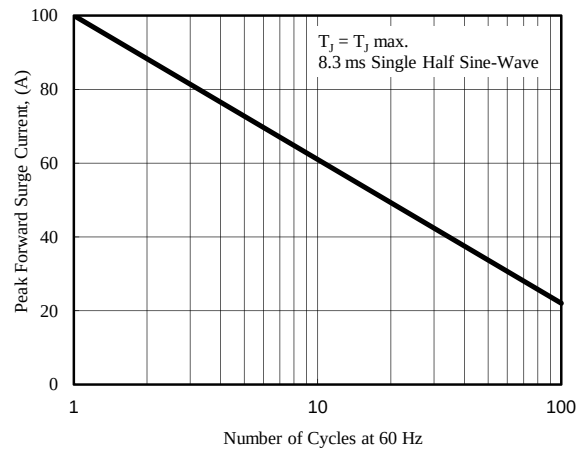


Fig. 2 - Maximum Non-Repetitive Surge Current

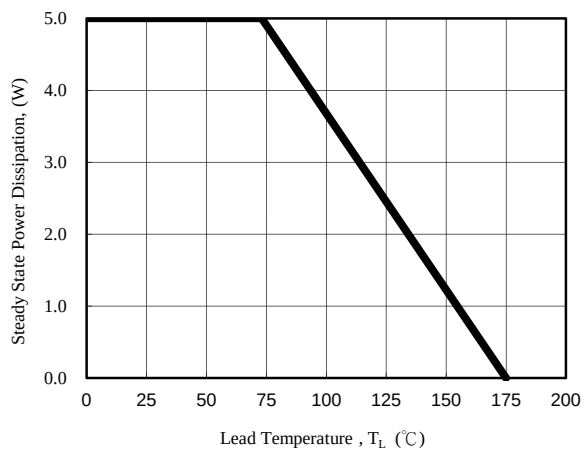


Fig. 3 - Steady State Power Derating Curve

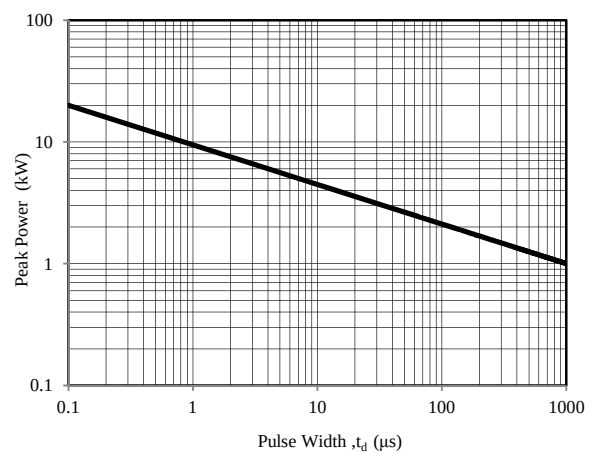


Fig. 4 - Peak Pulse Power Rating Curve

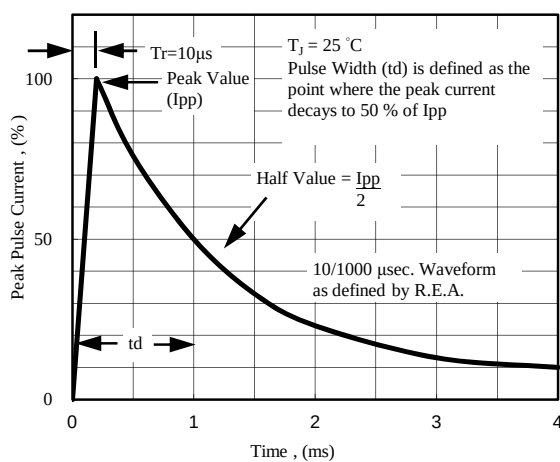


Fig. 5 - Pulse Waveform

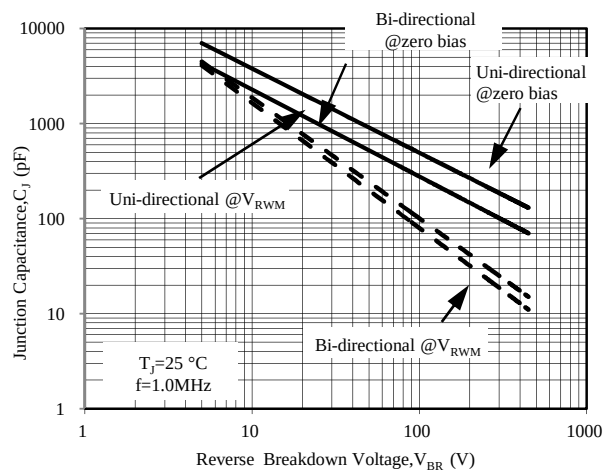


Fig. 6 - Typical Junction Capacitance

Electrical Characteristics(T_A=25°C unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Device Marking Code		Breakdown Voltage V_{BR} @ I_T			Maximum Reverse Leakage I_R @ V_{RWM} (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} (A)	Maximum Clamping Voltage V_C @ I_{PP} (V)
		Uni	Bi	Min (V)	Max (V)	I_T (mA)				
SMB10J5.0A	SMB10J5.0CA	AKE	AAE	6.40	7.00	10	800	5.0	108.70	9.2
SMB10J6.0A	SMB10J6.0CA	AKG	AAG	6.67	7.37	10	800	6.0	97.09	10.3
SMB10J6.5A	SMB10J6.5CA	AKK	AAK	7.22	7.98	10	500	6.5	89.29	11.2
SMB10J7.0A	SMB10J7.0CA	AKM	AAM	7.78	8.60	10	200	7.0	83.33	12.0
SMB10J7.5A	SMB10J7.5CA	AKP	AAP	8.33	9.21	1	100	7.5	77.52	12.9
SMB10J8.0A	SMB10J8.0CA	AKR	AAR	8.89	9.83	1	50	8.0	73.53	13.6
SMB10J8.5A	SMB10J8.5CA	AKT	AAT	9.44	10.40	1	10	8.5	69.44	14.4
SMB10J9.0A	SMB10J9.0CA	AKV	AAV	10.00	11.10	1	5.0	9.0	64.94	15.4
SMB10J10A	SMB10J10CA	AKX	AAX	11.10	12.30	1	5.0	10.0	58.82	17.0
SMB10J11A	SMB10J11CA	AKZ	AAZ	12.20	13.50	1	5.0	11.0	54.95	18.2
SMB10J12A	SMB10J12CA	ALE	ABE	13.30	14.70	1	5.0	12.0	50.25	19.9
SMB10J13A	SMB10J13CA	ALG	ABG	14.40	15.90	1	1.0	13.0	46.51	21.5
SMB10J14A	SMB10J14CA	ALK	ABK	15.60	17.20	1	1.0	14.0	43.10	23.2
SMB10J15A	SMB10J15CA	ALM	ABM	16.70	18.50	1	1.0	15.0	40.98	24.4
SMB10J16A	SMB10J16CA	ALP	ABP	17.80	19.70	1	1.0	16.0	38.46	26.0
SMB10J17A	SMB10J17CA	ALR	ABR	18.90	20.90	1	1.0	17.0	36.23	27.6
SMB10J18A	SMB10J18CA	ALT	ABT	20.00	22.10	1	1.0	18.0	34.25	29.2
SMB10J19A	SMB10J19CA	ALB	ABB	21.10	23.30	1	1.0	19.0	32.49	30.8
SMB10J20A	SMB10J20CA	ALV	ABV	22.20	24.50	1	1.0	20.0	30.86	32.4
SMB10J22A	SMB10J22CA	ALX	ABX	24.40	26.90	1	1.0	22.0	28.17	35.5
SMB10J24A	SMB10J24CA	ALZ	ABZ	26.70	29.50	1	1.0	24.0	25.71	38.9
SMB10J26A	SMB10J26CA	AME	ACE	28.90	31.90	1	1.0	26.0	23.75	42.1
SMB10J28A	SMB10J28CA	AMG	ACG	31.10	34.40	1	1.0	28.0	22.03	45.4
SMB10J30A	SMB10J30CA	AMK	ACK	33.30	36.80	1	1.0	30.0	20.66	48.4
SMB10J33A	SMB10J33CA	AMM	ACM	36.70	40.60	1	1.0	33.0	18.76	53.3
SMB10J36A	SMB10J36CA	AMP	ACP	40.00	44.20	1	1.0	36.0	17.21	58.1
SMB10J40A	SMB10J40CA	AMR	ACR	44.40	49.10	1	1.0	40.0	15.50	64.5
SMB10J43A	SMB10J43CA	AMT	ACT	47.80	52.80	1	1.0	43.0	14.41	69.4
SMB10J45A	SMB10J45CA	AMV	ACV	50.00	55.30	1	1.0	45.0	13.76	72.7
SMB10J48A	SMB10J48CA	AMX	ACX	53.30	58.90	1	1.0	48.0	12.92	77.4
SMB10J51A	SMB10J51CA	AMZ	ACZ	56.70	62.70	1	1.0	51.0	12.14	82.4
SMB10J54A	SMB10J54CA	ANE	ADE	60.00	66.30	1	1.0	54.0	11.48	87.1
SMB10J58A	SMB10J58CA	ANG	ADG	64.40	71.20	1	1.0	58.0	10.68	93.6


Note:

1. Add suffix 'C' or 'CA' after part number to specify Bi-directional devices
2. For Bi-Directional devices having V_R of 10 volts and under, the I_R limit is double



Outline Drawing


SMB(DO-214AA)

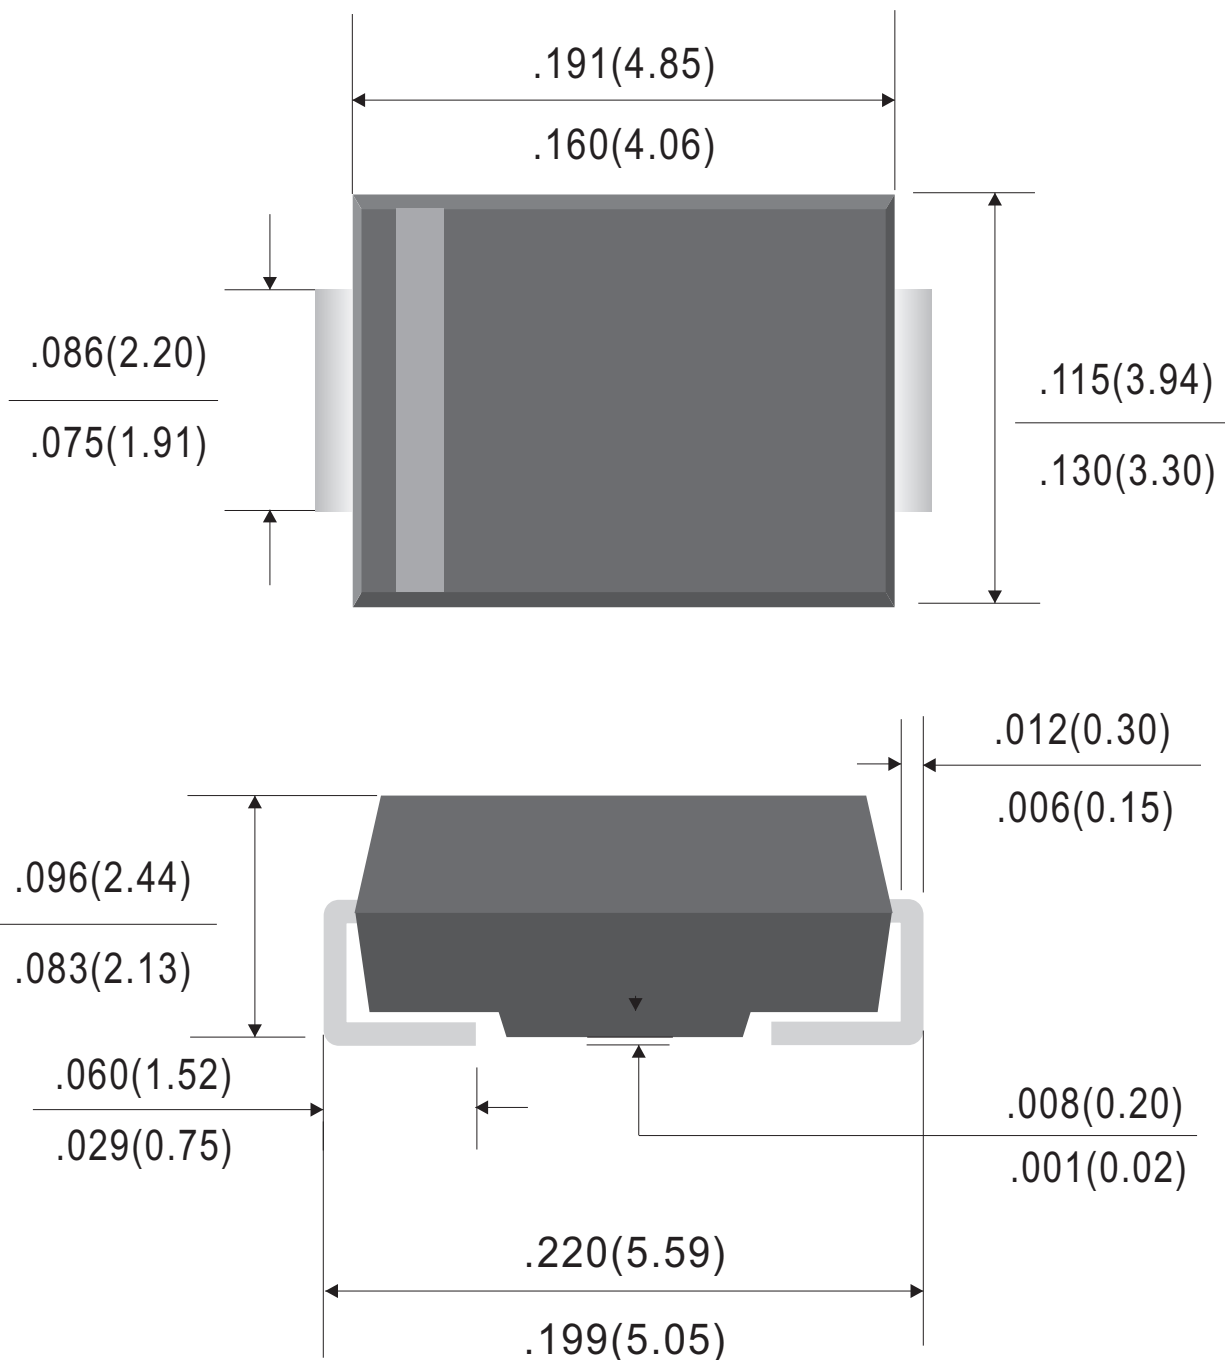

Dimensions in inches and (millimeters)

Rev.E

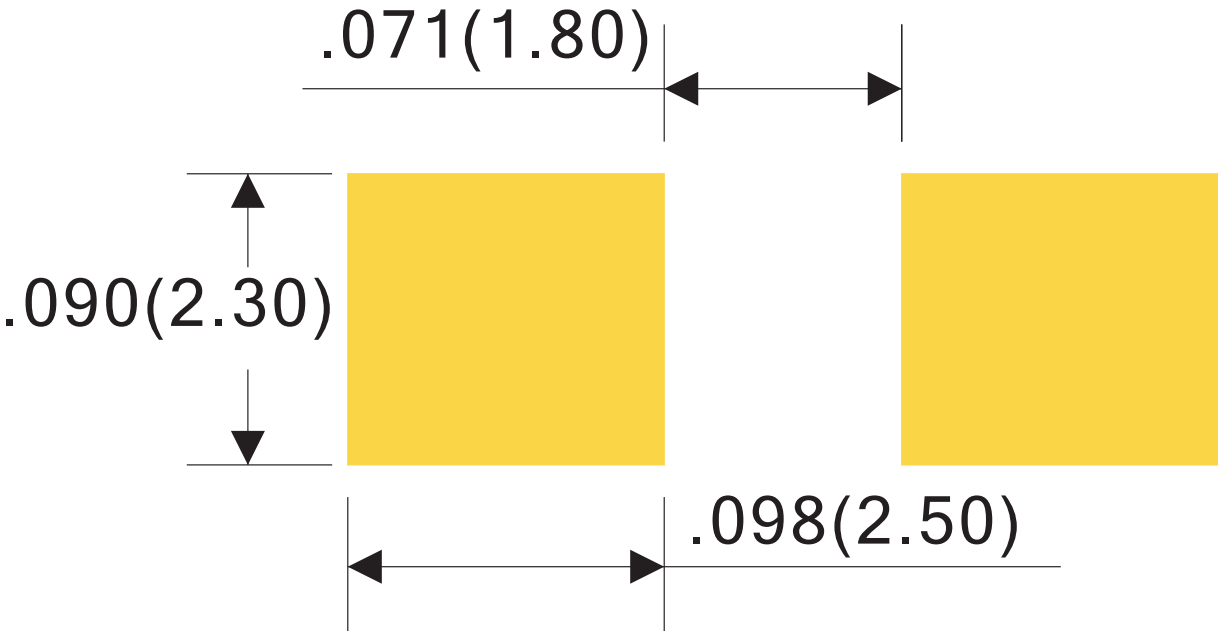

Suggested Soldering Pad Layout	SMB
 Dimensions in inches and (millimeters) RevA	

Ordering Information:

Device PN	Packing
Part Number -T ⁽¹⁾ G ⁽²⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) Packing code, Tape & Reel

(2) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

This is the preliminary specification. WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.