

# FECS40-1000 - for the Detection of Carbon Monoxide

## Features:

- \* High sensitivity/selectivity to CO
- \* Quick response to CO
- \* Linear output
- \* Long life
- \* Stable baseline
- \* Unique leak-proof structure

## Applications:


- \* Portable and fixed installation CO monitors
- \* CO detectors
- \* Ventilation control for indoor parking garages

The FECS40-1000 is a unique electrochemical-type carbon monoxide sensor. Its most notable feature is its unique leak-proof structure, making it ideal for CO monitors and detectors in various fields.




## Sensitivity Characteristics:

Typical characteristics (linearity) of FECS40-1000 (20°C) are shown below.

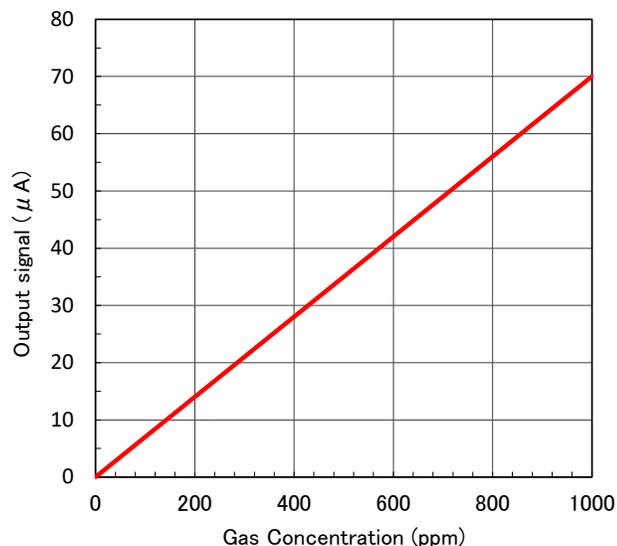

## Temperature Dependency:

Typical characteristics (temperature dependency) of FECS40-1000 are shown below.

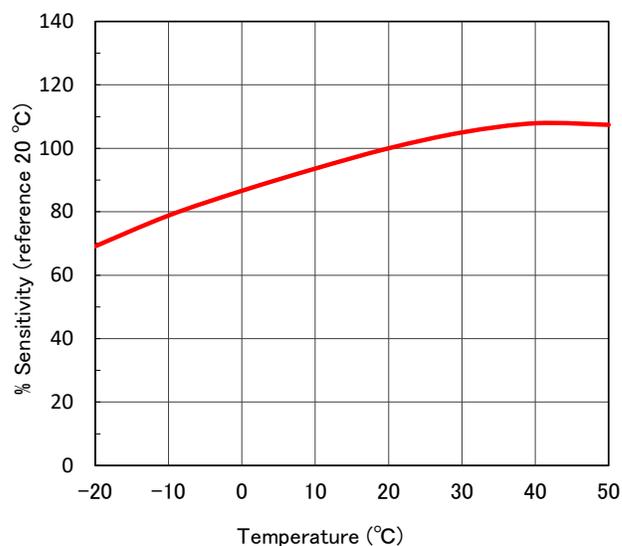

### Specifications:

Detection Gas	Carbon Monoxide
Detection Range	0 ~ 1000 ppm
Maximum Overload	1500 ppm
Output Signal	70 ± 15 nA/ppm (*1)
Repeatability	±2% (*1)
Resolution	1 ppm (*1)
Baseline Range (Clean air)	-2 ppm to +3 ppm (*1)
Response Time (t <sub>90</sub> )	< 30 sec (*1)
Baseline Shift (-20 ~ 40°C)	< 5 ppm (typical) (*1)
Long Term Output Drift	< 5% /year (*1)
Expected Life Time	> 3 years (*1,*2)
Operating Temperature	-20 ~ 50°C
Operating Humidity	15 ~ 90% RH
Operating Pressure Range	1013 hPa ±10%
Recommended Load Resistor	10 Ω
Bias Voltage	Not required
Position Sensitivity	None
Recommended Storage Temp.	0 ~ 20°C
Cap Color	Red
Weight	4.5g (approx.)

\*1 Factory test data conditions: 20°C, 50%RH and 1013 hPa.

\*2 Life expectancy in normal air under the factory test conditions is defined as the period until sensor output drops to 60% of its original value.




### Cross Sensitivity Data :

Table1 shows the typical response of FECS40-1000 to interference gases.

Table1 Cross Sensitivity of FECS40-1000 (20°C)

Gas	Concentration (ppm)	Typical Carbon Monoxide Concentration(ppm)Equivalent
Carbon Monoxide	100	100
Hydrogen	100	< 40
Carbon Dioxide	5,000	0
Sulphur Dioxide	30	0
Hydrogen Sulfide	30	0
Nitric Oxide	30	< 3
Nitrogen Dioxide	30	0
Ammonia	100	0
Ethanol	200	0

### Dimensions:

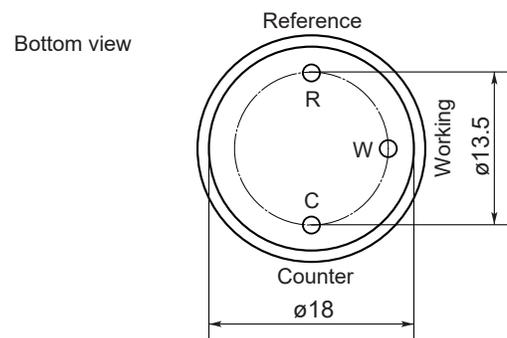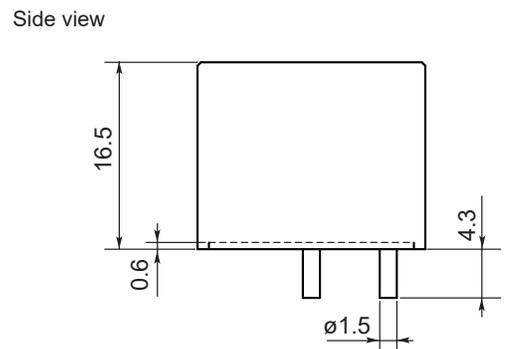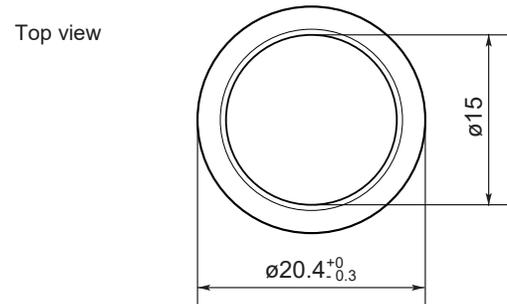

Unit: mm

All tolerance ± 0.1mm unless otherwise stated.

The following are the recommended socket pins of FECS-series gas sensors:

Recommended specifications:

- Basically fitting male pin diameter is φ1.5 mm
- Male pin insertion depth is 4.3 mm or more

Socket pins (example):

S.E.R. Corporation: SS 6000-00

Mac Eight Co., Ltd: PD-152