
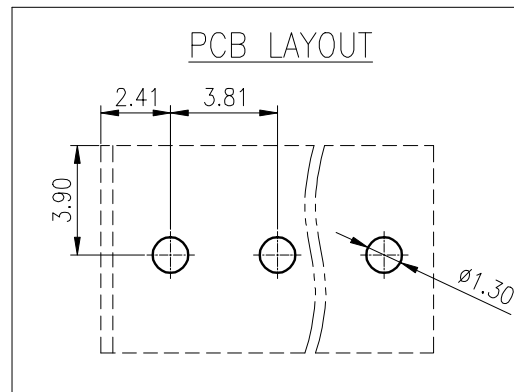
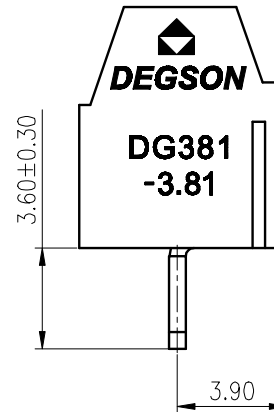
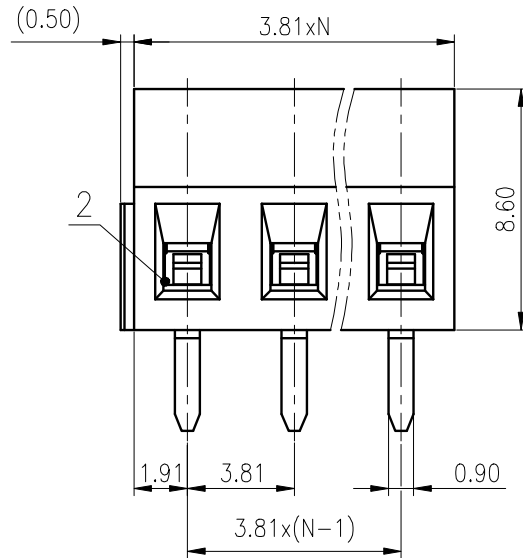
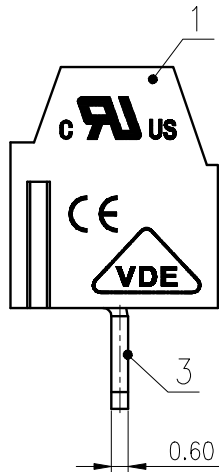


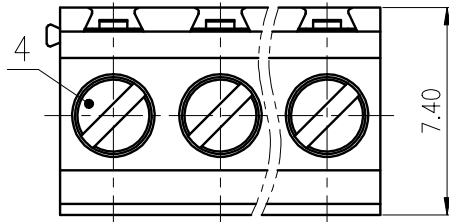

公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2°

4	Screw	Steel	M2/Zn Plated
3	Pin header	Copper alloy	Sn Plated
2	Cage	Copper alloy	M2/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		/	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	130/10
工频耐压/Withstanding Voltage(V/Min)		/	AC1250
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~1.0/26~16	
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P	
剥线长度/Stripping length(mm)		5~6	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		/	
PANTONE / RAL			

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.06.22		NAME: DG381-3.81-XXP-1Y-00A(H)	
CHKD: Mao J 2020.06.22			
DRFT:Wang LX 2020.06.22		DRAWING NO.: 10001575	
		REV	TO
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 4:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------