

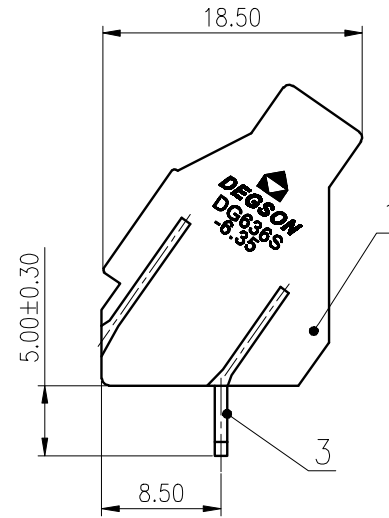
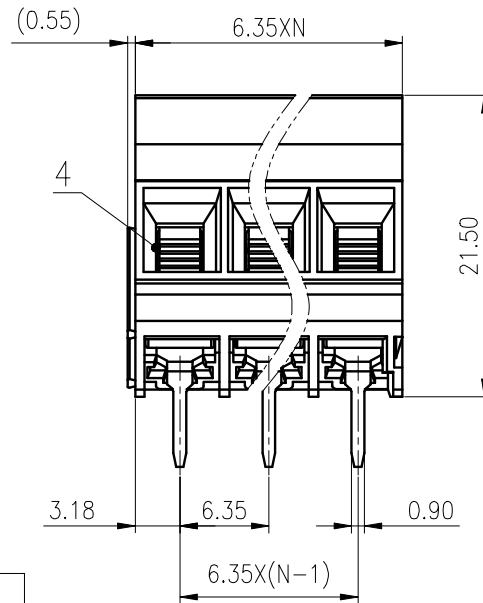
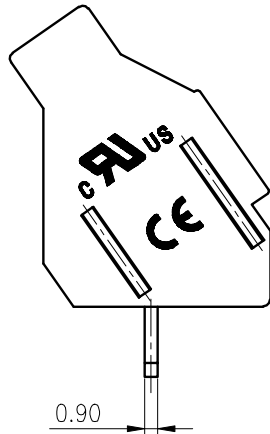





PCB LAYOUT

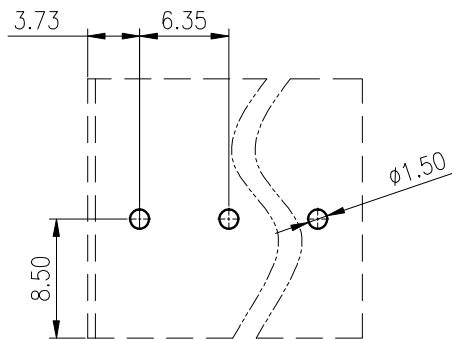

公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

4	Cage	Copper Alloy	M3.5/Ni Plated
3	Pin Header	Copper	Sn Plated
2	Screw	Steel	M3.5/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/30	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2	III/2	III/3
额定电压/电流/Rated Voltage(V)/Current(A)		1000/32	630/32	500/32
额定脉冲电压(kV)/Rate Impulse Voltage(kV)		6.0		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3.5: 0.57/5.0, ≥0.3P: 0.8/7.02		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~4/6(sol)/30~10		
间距/Pitch(mm)/线数范围/Poles		6.35/N=02~24P		
剥线长度/Stripping length(mm)		8~9		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Confirm to RoHS		Yes		

MATERIAL: /		符合RoHS环保要求/Confirm to RoHS		Yes	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD: Lan ChH 2020.05.16					
CHKD: Yu JZh 2020.05.16					
DRFT: BYH 2018.07.04		NAME: DG636S-6.35-XXP-1Y-00A(H)			
		DRAWING NO.: DG636S-6.35-C01		REV	T1
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------