
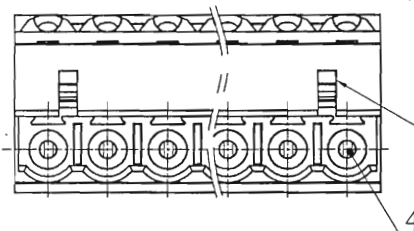
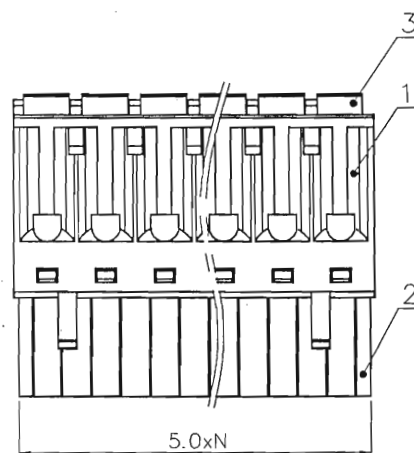
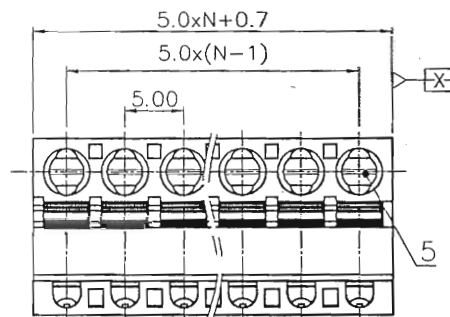


active

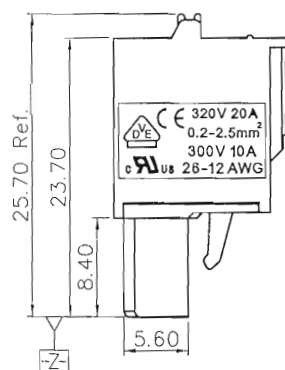

2P: One hook point,
on the right side;
>2P: Two hook point.

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1. Rated voltage/current : 300V/10A
2. Withstanding voltage : AC1600V/1min.
3. Wire range : 26~12AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320V
Rate current(A)	20A

2. Wire range : 0.2~2.5mm²


NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.0mm, Poles : N=02~24P
3. Stripping length : 9~10mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	10	10	24	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°


6. RoHS Compliance

2EDGKD - 5.0 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1. (Grey)
(RoHS) 00A - (Standard)



1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn-plated
3	Button	PA66	UL974V-0
2	Cover	PA66	UL974V-0
1	Housing	PA66	UL974V-0

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: <i>Amor 2019.01.10</i>		NAME: 2EDGKD-5.0-XXP-1Y-00A(H)			
	CHKD: <i>Mek 2019.01.10</i>					
	DRFT: ChenK 2019.01.10		TITLE: CUSTOMER DRAWING			
	 THIRD ANGLE PROJECTION		DRAWING NO.: 2EDGKD-5.0-C01			
			 MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1