
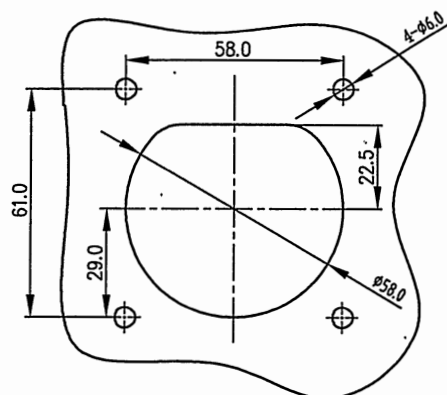


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

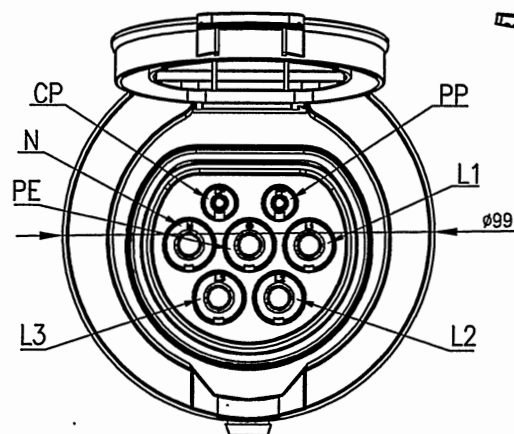

Installation plate dimension

Technical data	
Rated voltage	480V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ,500V DC 1min
Withstanding Voltage	L、N and PE 2500V AC 1min L and N 2500V AC 1min
Ingress protection rating	IP54
Mechanical Working Life (Mating Cycles)	10,000 Times
Standard	IEC 62196-2:2016
Flame Class	UL 94V-0

Connection Mode:

L1	(6mm ²)	L1
L2	(6mm ²)	L2
L3	(6mm ²)	L3
N	(6mm ²)	N
PE	(6mm ²)	PE
PP	(0.75mm ²)	PP
CP	(0.75mm ²)	CP
NTC	White	T1
	White	T2

Attention:

The Thermistor is placed beside of L1

The Thermistor is NTC

(Specification :T= 25°C Resistance = $10 \pm 1\%$ Kohm)

The resistance decreases with increasing temperature


Size Measure Range	. XX	. X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	. XX	. X
	±0.5°	±1.0°

	PART NO.:
--	-----------

APPD: ZX 20191016

CHKD: DT 2019.10.16

DRFT: LLL 2019-10-16



THIRD ANGLE PROJECTION



DEGS

 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

Socket-Outlet (32A AC three-phase)
FEAC-T-032A-P1-03-0.0M-25A(H)

TITLE: Customer Drawing


DRAWING NO.:

MM
(INCH)

REV	D0-1
-----	------

SHEET	1 / 1
-------	-------

SCALE	2:5
-------	-----

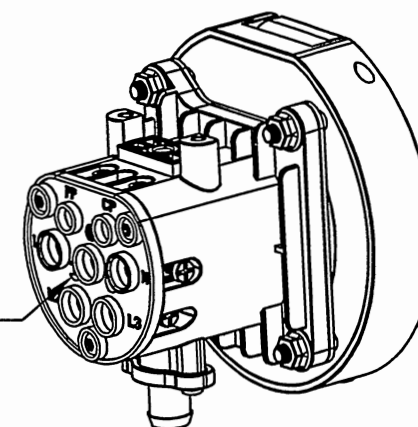

Temperature sensor clip hole
for NTC sensor

Laser Printing:



32A 480V AC
IP54
FEACT032AP1030.0M25AH
20XXXXXX-XXXX

active 