


REVISION RECORD

REV	ECN	DESCRIPTION	DWFT	DATE
-----	-----	-------------	------	------

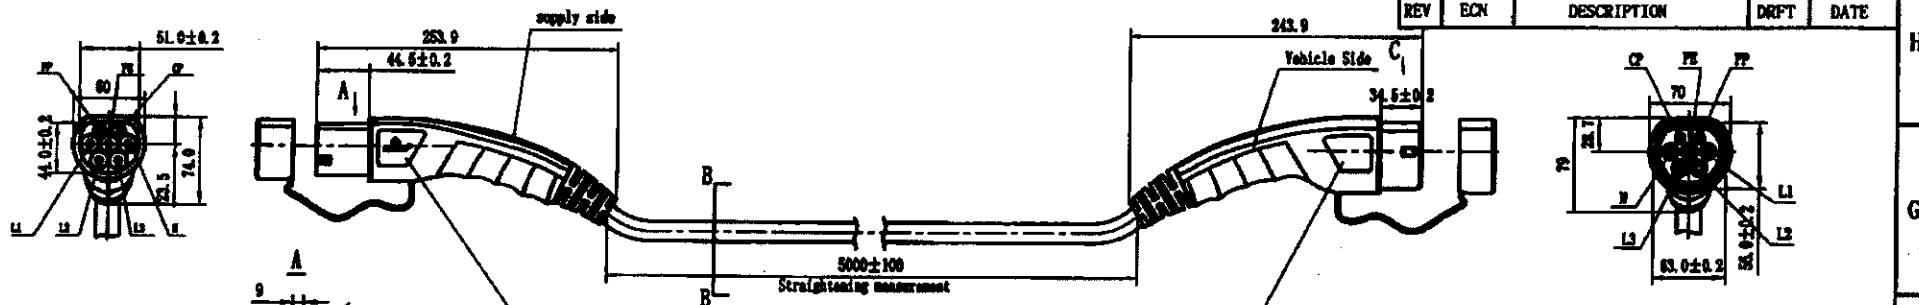

Wiring diagram

POWER SUPPLY ELECTRIC VEHICLE

L1 6mm² Brown

Spare

Spare

N 6mm² BluePE 6mm² Yellow/Green

PP

CP 0.75mm² Red

RC-220Ω±3% 0 RC-220Ω±3% 0

L1 6mm² Brown

Spare

Spare

N 6mm² BluePE 6mm² Yellow/Green

PP

CP 0.75mm² Red

Laser Printing Front Note:



Laser Printing Back Note(Arial):

MEAC-S-032A-P1-03-5.0M-30AH

32A 250V AC

IEC 62196-2:2016

IP54

201xxxxx-xxxx

Laser Printing Front Note(Arial):

MEAC-S-032A-V1-03-5.0M-30AH


32A 250V AC

IEC 62196-2:2016

IP54

201xxxxx-xxxx

Laser Printing Back Note:

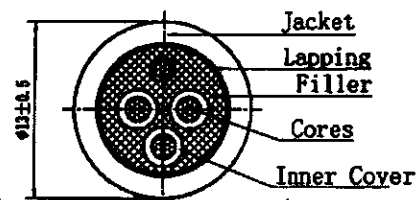

SEC B-B

Technical parameters

Rated voltage	250V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

NOTES:

1. Cable: EN50620-2017 3*6mm²+1*0.75mm² Black
2. RoHS Compliance

Wire Gauge Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Gauge Range	.XX	.X
	±0.5°	±1.0°


PART NO.:

active

APP: ZX 2020.1.16

CHK: DT 2020.1.16

DWFT: BY 130 2020-01-16



THIRD ANGLE PROJECTION

宁波高松电子有限公司



NINGBO DEGSON ELECTRICAL CO., LTD

NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A single-phase)

MEAC-S-032A-V1P1-03-5.0M-30AH

TITLE: Customer Drawing

DRAWING NO.:

(INCH)

REV DO-1

SHEET

1/1

SCALE 1:6