




未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

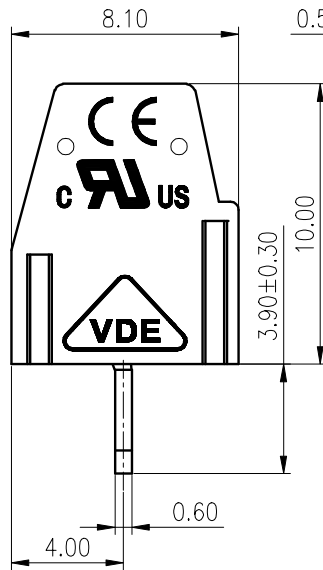


0.50 Ref.

5.08XN

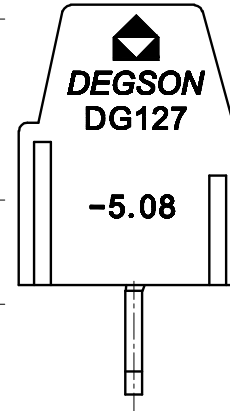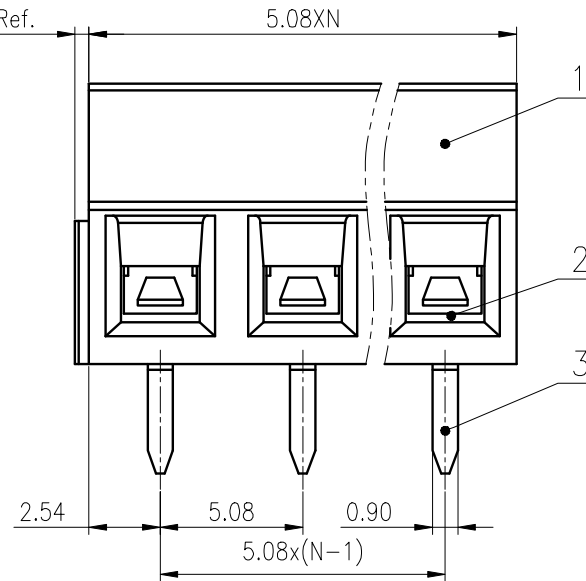

4	Screw	Steel	M3/Zn Plated
3	Pin header	Copper alloy	Sn Plated
2	Cage	Copper alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/12	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		/	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	250/15
工频耐压/Withstanding voltage(V/1Min)			AC2000
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M3, 02P 0.34/3.04 ≥03P 0.5/4.43
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)			0.75~1.5/26~14
间距/Pitch(mm)/线数范围/Poles			5.08/N=02~24P
剥线长度/Stripping length(mm)			6~7
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes
标准颜色编号/Standard color number:			/
PANTONE / RAL			/

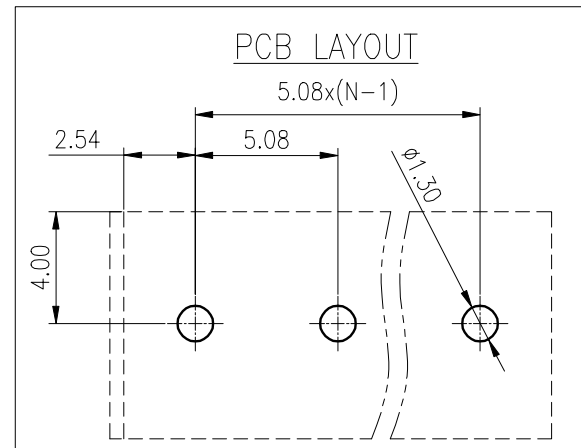

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG127-5.08-XXP-1Y-1000A(H)	
APPD: LiGL 2020.06.23		DRAWING NO.: DG127-5.08-C31	
CHKD: Mek 2020.06.23		REV	T3
DRFT: WYJ 2014.09.28		SHEET 1/1	
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 4:1