

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 6.3A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 16~12AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	3.0KV
Rate voltage(V)	500V
Rate current(A)	6.3 A



- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.2mm, Poles : 01P
- 3.Stripping length : 9.0mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm							
TO	Over	TO	Over	TO	Over	TO	Over	TO	Over
6	10	10	24	30	60	60	100	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	±2'

6.RoHS Compliance

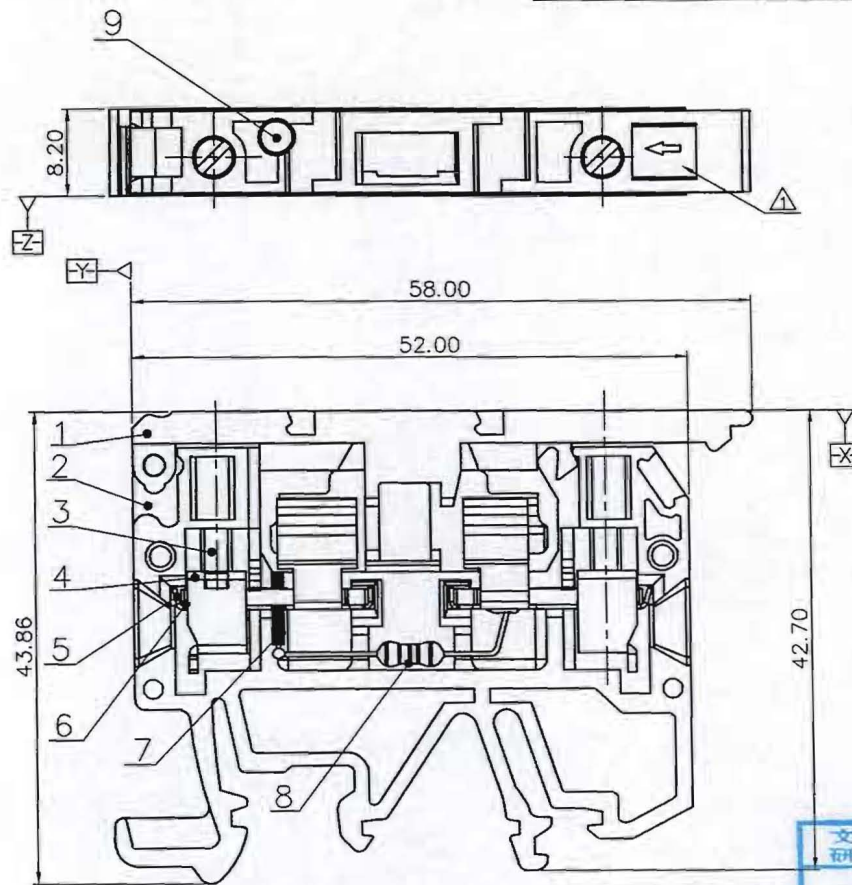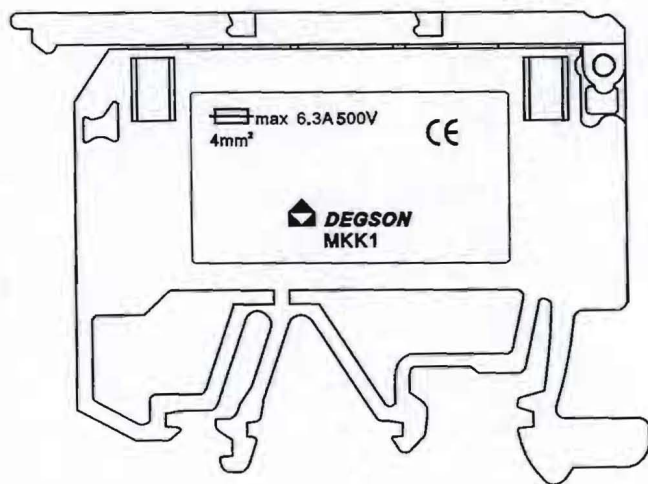

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
1	19-0227	Change design	ZYP	2019.06.05

active

9	Led red light		
8	Resistor(150KΩ)		
7	Wire saddle		
6	Bridge	Steel	Zn Plated
5	Clamp	Phosphor bronze	Sn Plated
4	Cage	SPCC	M3/Zn Plated
3	Screw	Steel	M3/Zn Plated

PART NO.:

APPD: *Harmon 2019.7.17*

CHKD: 1

DRFT: XMY 2016.05.07

THIRD ANGLE PROJECTION

2	Housing	PA66	UL94V-0
1	Fuse housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: MKK1-LD-01P-1Y-00A(H)

TITLE: CUSTOMER DRAWING	REV	T1
DRAWING NO.: MKK1-LD-C01	SHEET	1/1
DO NOT SCALE DRAWING	SCALE	1:1

文管中心
研 发 部
2019.07
(仅限内部使用, 对外无效)