

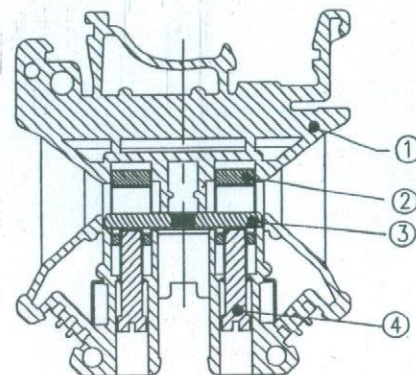
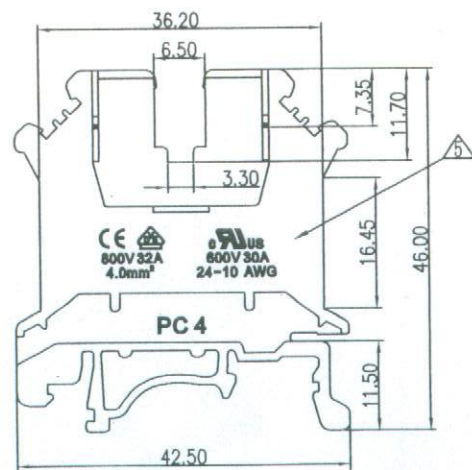


active

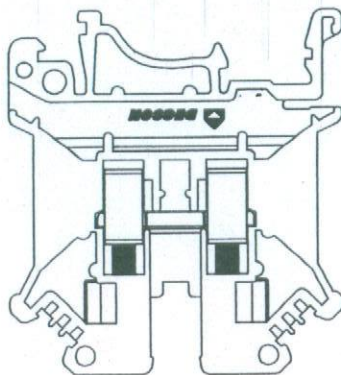

SECTION A-A

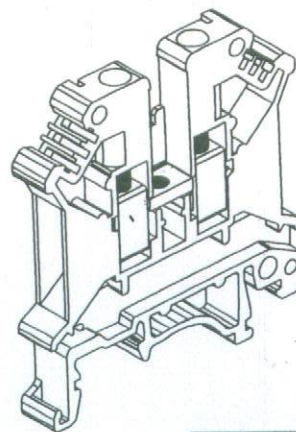


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		修改刻字	CSX	04/03/'06
△		去掉UL里面的小R字	CSX	08/31/'07
△		品名、料号增加环保标示“(H)”	LJH	12/10/07
△		增加VDE、CE刻字	CSX	02/27/'08

Notes:

- Pitch: 6.2mm
- Insulation resistance: 5000MΩ/1000V
- Withstanding voltage: AC3000V/1Min
- Wire range: 24-10AWG, 4mm²
- Rated voltage/current: UL 600V/30A
VDE 800V/32A
- Temp. Range: -40° C ~ +105° C
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150	—
to 6	to 10	to 24	to 30	to 60	to 100	to 150		□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	Q05/10

4	PC 4-SCREW	S000001060 (H)	2	Brass	Ni plated
3	PC 4-CONTACT	6002B00010 (H)	1	COPPER	SnCe

2	PC 4-BRASS CAGE	X000000630 (H)	2	Brass	NI PLATED
1	PC 4-HOUSING	6002A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	 MM (INCH)		 DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED				
	MM				
	.00 ±	±			
	.000 ±	±			
ANGLES ± 1°		NAME PC 4-01P-1Y-00A(H)			
 THIRD ANGLE PROJECTION		DRAWING NO. PC 4-E01		SIZE A3	REV T5
SCALE : 1:1		/PART NO.		12/27/08	
DO NOT SCALE DRAWING			SHEET 1 OF 1		