
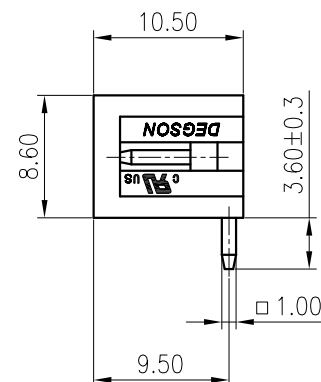
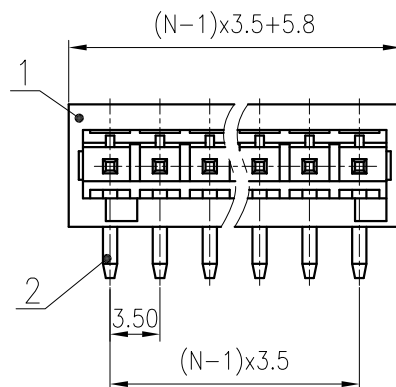


PCB LAYOUT

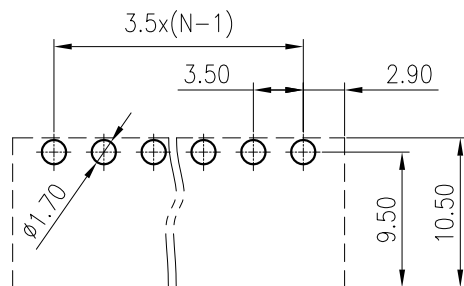

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/10	/
IEC 标准/IEC Standard:			D
过压类别/Overvoltage Category/污染等			III/3
级/Pollution Degree			
额定电压/电压/Rated Voltage(V)/Current(A)			130/10
额定脉冲电压(kV)/Rate Impulse Voltage(KV)			2.5
螺丝扭矩/Torque Tightening(N·m/Lb.in)			/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)			/
间距/Pitch(mm)/线数范围/Poles			3.5/02~24P
剥线长度/Stripping length(mm)			/
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes
标准颜色编号/Standard color number:			PANTONE 7534U
PANTONE / RAL			

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: /		NAME: 8EDGRC-3.5-XXP-11-01A(H)	
CHKD: /			
DRFT: ZhuYP2020.03.17		DRAWING NO.: 10001577	
		REV T0	
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 2:1	SHEET 1/1