


D1RFRD006

active




REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		Drawing Revise	Haoyh	02/27/06	
2		增加VDE、CE标志	LJH	11/16/07	

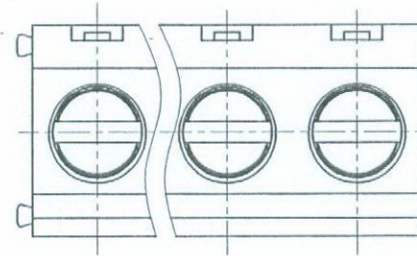

Notes:

1. pitch: 5.08mm poles:2-24P
2. Rated voltage/current:UL 300V/12A
VDE 250V/15A
3. Insulation resistance: 5000MΩ/DC1000V
4. Wrtstanding voltage: AC2000V/1Min
5. Wire range: 26-14AWG 1.5mm²
6. Temp. Range: -40° C~+105° C
7. Torque: M2.5 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	over	to	over	over	over	over	
6	6	10	30	30	60	100	150	—
6	10	24	30	60	100	150		□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

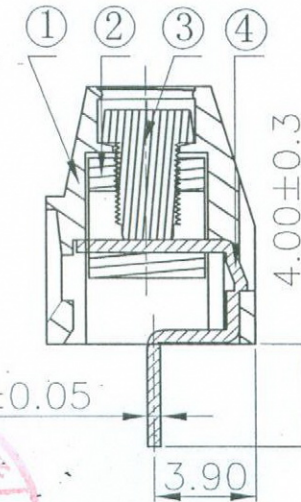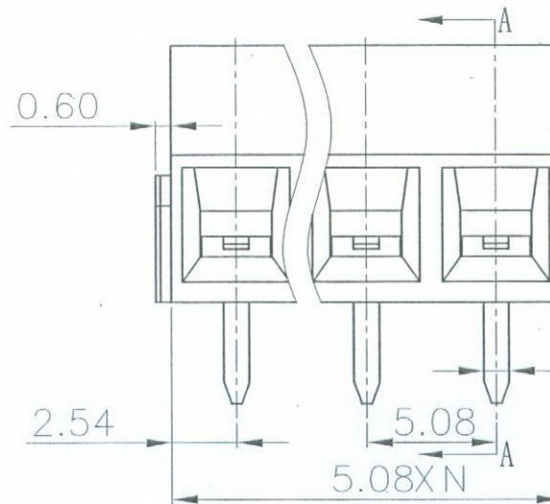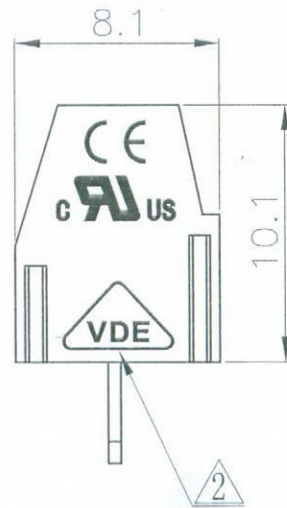

截面 A-A



4	DG127 Pin header	4028B00010 (H)	XX	Brass	SnCe
3	DG127"-Screws-M2.5	S000001450 (H)	XX	Steel	Cr ³ Zn
2	DG127 Brass cage	X000000170 (H)	XX	Brass	Ni plated

1	DG127-5.08-Housing	4052A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	MM (INCH)		DFTO DZJ	DATE 10/10/05		
	TOLERANCES EXCEPT AS NOTED		CHKD <i>Hang</i>	DATE 01/07/08		
			MFO	DATE		
			APPLV <i>LSC</i>	DATE 01/10/08		
	MM		NAME			
	.0 ±		DG127-5.08-XXP-1Y-00A(H)			
	.00 ±		DRAWING NO. DG127-5.08-E04			
	.000 ±		/PART NO.			
	ANGLES ± 1°		SIZE			
	THIRD ANGLE PROJECTION		REV			
SCALE: 1:1		T2				
		11/16/07				
		A3				
		DO NOT SCALE DRAWING				
		SHEET 1 OF 1				

8 7 6 5 4 3 2 1