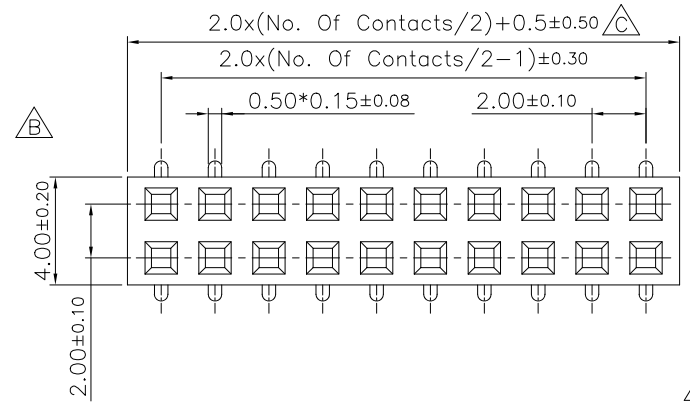

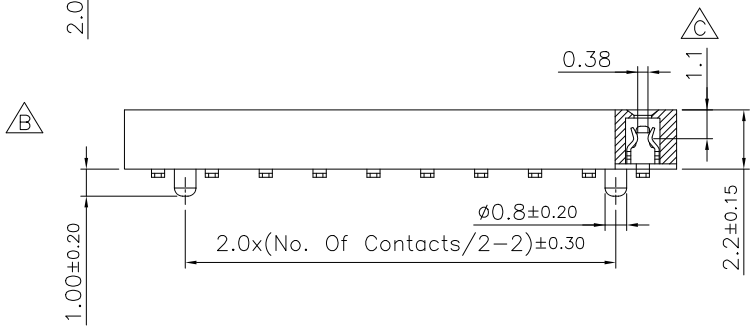



W/O Peg



With Peg

Specifications:
Current Rating: 2.0A AC,DC
Contact Resistance: 20m ohm.Max
Insulation Resistance: 1000M ohm.Min
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range:−40°C ~ +105°C

Material:
Insulator: High Temp. Plastic (UL94V−0)
Insulator Color: Black
Terminal: Copper Alloy
Plated: Gold/Matte Tin/Selective Gold Plated

How To Order
2207SM−XXX−24−XXX B C

- PCH:Cap+Peg+Tape & Reel
- PCR:Cap+Tape & Reel B
- MCH:Mylar+Peg+Tape & Reel C
- MCR:Mylar+Tape & Reel C
- PCT:Cap+Tube
- G:Gold Plated
- C G10:Gold Plated 10u" On Contact Area, Gold Plated On Solder Tail.
- T:Matte Tin Plated
- SG:Gold Plated On Contact Area, Matte Tin Plated On Solder Tail.
- No. Of Contacts
- SMD Type

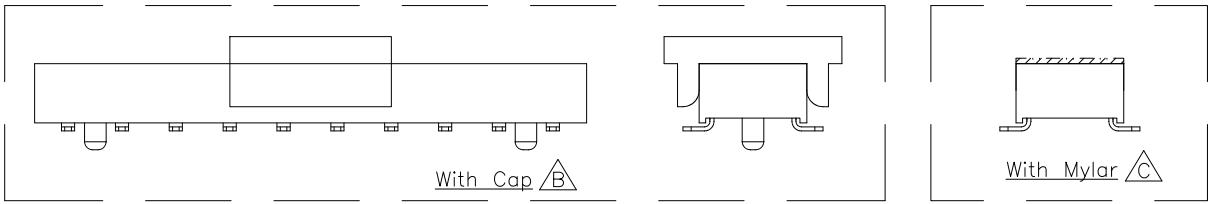

With Cap B

With Mylar C

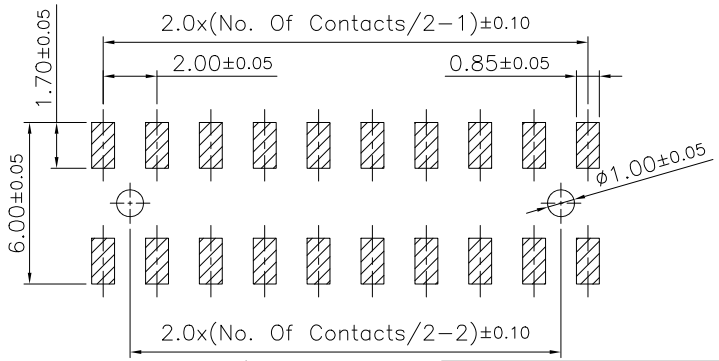

B P.C.B Layout

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C	21−NOV−2024	C	LUCY
B	23−MAY−2024	B	JAMIE
A	27−JUN−2022		SELIN

DRAWN: SELIN
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.30
.XX=±0.20

UNIT: MM
SCALE: 1:1
SHEET: 1/3
PROJECTION:

Neltron Connectors **Neltron Industrial Co., Ltd.**

DESCRIPTION: 2.0mm PCB Socket Double Row SMD Type

PART NO: 2207SM−XXX−24−XXX C

SIZE **A4**