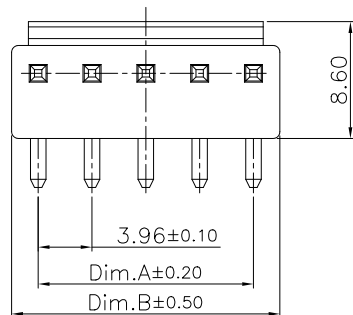


Dimension:

Pos.	Dimension:	
	A	B
02	3.96	7.86
03	7.92	11.82
04	11.88	15.78
05	15.84	19.74
06	19.80	23.70
07	23.76	27.66
08	27.72	31.62
09	31.68	35.58
10	35.64	39.54

Specifications:

Current Rating:7.0A AC,DC

Voltage Rating:250V AC,DC

Contact Resistance:10mohm Max

Insulation Resistance:1000Mohm Min.

Withstanding Voltage:1500V AC/minute

Operating Temperature Range:-40°C~+105°C

Material And Finish:

Insulator:Nylon 66 (UL94V-0)

Insulator Color:White

Contact:Brass


Plating:Tin Plated

How to Order

2114R-XX

No. Of Contacts

Right Angle

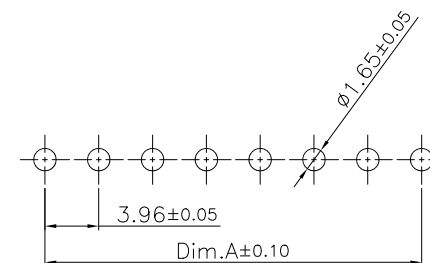

P.C.B layout

RoHS Compliant

F				DRAWN: VITO	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: JERRY	UNIT: MM	DESCRIPTION: 3.96mm Wire to Board R/A Type Wafer	SIZE A4
C	28-MAY-2024	Modify Q'ty	CHIKO		SCALE:		
B	30-OCT-2023	Delete Inner Carton	JAMIE	APPROVAL: RORY	SHEET: 1/2	PART NO: 2114R-XX	
A	09-JUN-2022		VITO		PROJECTION: 		
REV	DATE	FILE	BY				