


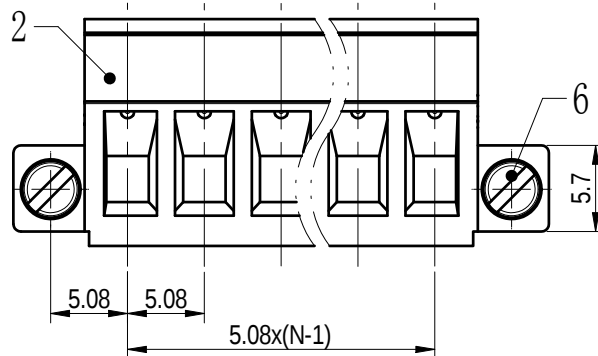





2P:Clasp on the
left from this view

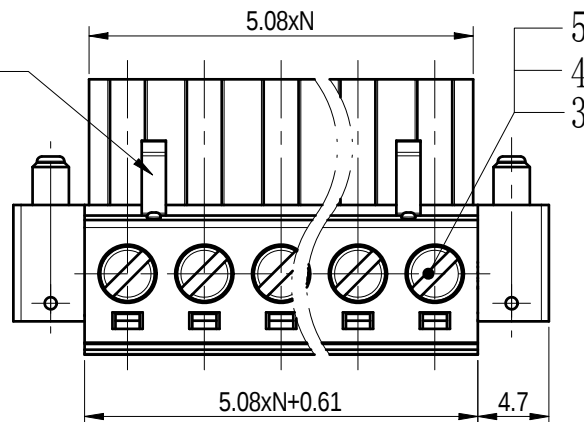

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

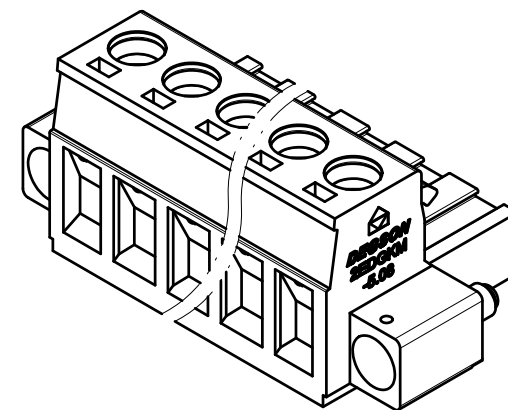

Note:

The A&Z (H) in the name means: A (H) and Z (H).

6	Screw2	Steel	M2.5/Zn Plated
5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Screw1	Steel	M3/Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)		B	C D
		300/15	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20 /
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4 /
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.6/5.3	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~12/ 1.0~2.5	
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~22P	
剥线长度/Stripping length(mm)		7~8	
使用温度范围/Operating temperature(°C)		-40~-+105	
符合RoHS环保要求/Conform to RoHS		Yes	



MATERIAL:

MAT NO./REV: - / 00

SURFACE/COLOR:

MAT STATUS: 批量

APPD: 兰春华 2022.08.16
CHKD: 龚耀志 2022.08.16

DRFT: 朱岳鹏 2022.08.16

NAME 2EDGKM-5.08-XXP-1Y-1000A&Z (H)

DRAWING NO. 200103401 TYPE CUSTOMER DRAWING DRAWING STATUS 已发布 SCALE 2:1 SHEET 1/1

00			朱岳鹏	2022.08.16
REV	ECN	DESCRIPTION	DRFT	DATE