




1.Font:Arial
2.Color:Black

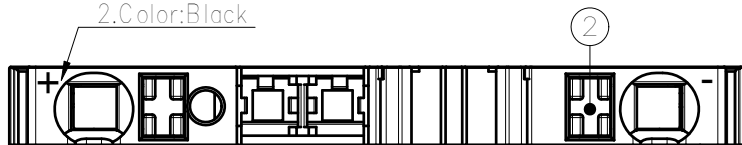

48.6

35.25


29.25

5.2

C1 1#
>PA66-FR<

34.7

Please refer to the 3D model,
for these unmarked dimensions.

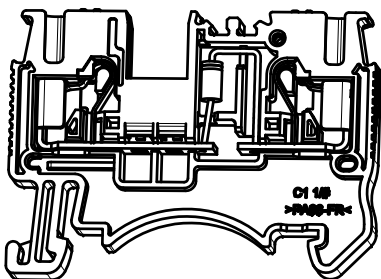

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A)

B

300/20

C

300/20

D

/

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3

III/2

II/2

额定电压/电流/Rated Voltage(V)/Current(A)

800/0.5

/

/

最大逆向耐压/Reverse Voltage(KV)

1.3

/

/

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)

26~12/

0.2~2.5&4(SOL)

间距/Pitch(mm)

5.2

剥线长度/Stripping length(mm)

10~12

使用温度范围/Operating temperature(°C)


-40~+105

符合 RoHS 环保要求/Conform to RoHS

Yes

标准颜色编号/Standard color number: PANTONE / RAL

/

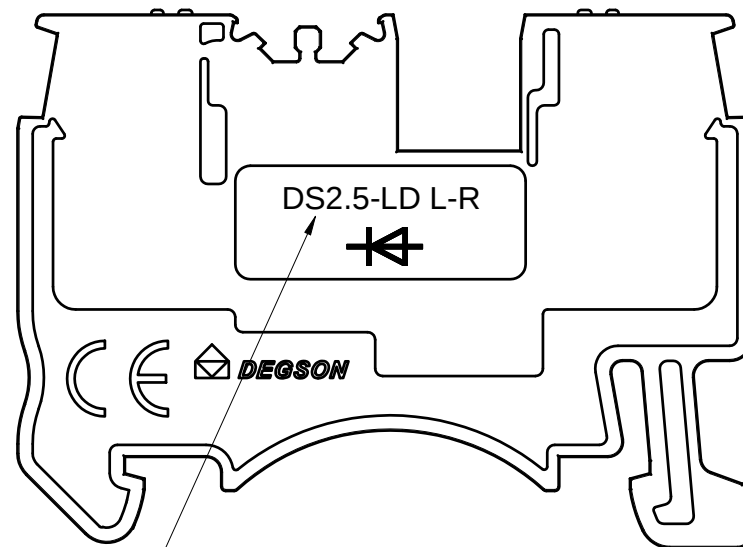

DS2.5-LD L-R



1.Font:Arial
2.Color:Black

6	Diode	/	/
5	Current_carrier 2	Copper	Sn Plated
4	Current_carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES



MATERIAL:

MAT NO./REV: 11040000232-1 / 00

SURFACE:

MAT STATUS:

APPD: 李根芳

2021.08.16

CHKD: 马恩开

2021.08.12

DRFT: 米帅

2021.08.12

DRAWING NO.

200008188

TYPE

CUSTOMER DRAWING

DRAWING STATUS

已发布

SCALE

2:1

SHEET

1/1

00	ECN	首版发行	米帅	2021.08.12
REV	ECN	DESCRIPTION	DRFT	DATE