

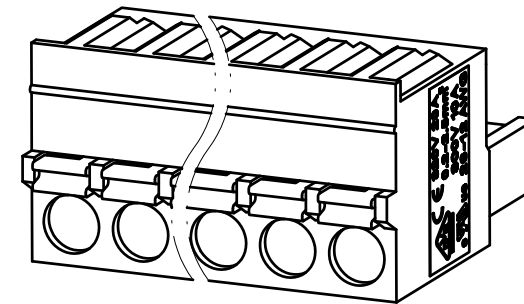




Technical drawing of the DEGSON 2EDGKD-5.0 device. The drawing shows the front view with the following dimensions and callouts:

- Overall width: 25.7 Ref.
- Overall height: 15
- Width of the left section: 8.4
- Height of the left section: 5.6
- Callout 1 points to the bottom right corner.
- Callout 2 points to the top left corner.
- Callout 3 points to the bottom right corner.

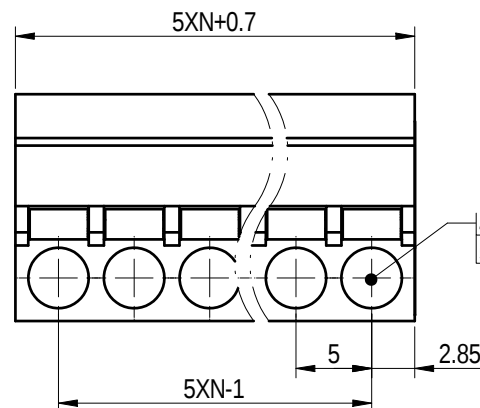

The A&Z(H) in the name means: A(H) and Z(H).

5	Spring	Stainless steel	/
4	Clamp	Copper Alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~12 / 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



APPD:	兰春华	2022.08.08
CHKD:	龚耀志	2022.08.08
DRFT:	方哲盛	2022.08.05

MATERIAL:	SURFACE/COLOR:
MAT NO. /REV. - / 00	MAT STATUS: 批号

8	NAME	2EDGKD-5.0-XXP-1Y-00A&Z (H)
---	------	-----------------------------

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200019062	CUSTOMER DRAWING	已发布	2:1	1/1

00			方哲盛	2022.08.0
REV	ECN	DESCRIPTION	DRAFT	DATE