

D1RFRD006


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.0MM ,POLES: 02-24P
- 3.RATED VOLTAGE/CURRENT: UL1059 300V/15A
IEC 320V/20A
- 4.OPERATION TEMPERATURES: -40℃~+105℃
- 5.RATED IMPULSE VOLTAGE: 4.0KV
- 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
- 7.WIRE RANGE: 22~14AWG,0.2~2.5MM²
- 8.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	TO	TO	OVER	TO	OVER	
6	6	10	30	60	100	150	150
6	10	24	30	60	100	150	150
±0.10±0.15±0.25±0.20±0.30±0.50±0.70±1.000.05/10							

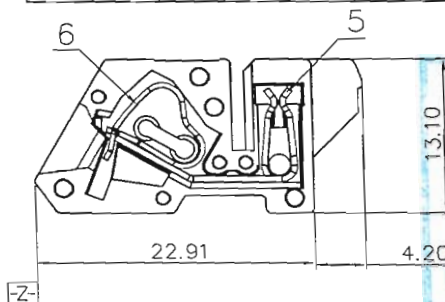

6	8EDG-STD-5.0-SPRING	X000005170(H)	XX	STAINLESS STEEL	
5	8EDG-STD-5.0 CLAMP	1380B00010(H)	XX	COPPER	TIN PLATED
4	8EDG-STDM-5.0 COVER2	1381C4101C(H)	1	PA66	UL94V-0
3	8EDG-STDM-5.0 COVER1	1381C4101A(H)	1	PA66	UL94V-0
2	8EDG-STDB-5.0 HOUSING	1382A4101A(H)	2,(XX=3) 1,(XX=2)	PA66	UL94V-0
1	8EDG-STD-5.0 HOUSING	1380A4101A(H)	X=2,(XX=4) 1,(XX=2,3)	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

TOLERANCES EXCEPT AS NOTED		MATERIAL:		FINISH:	
.X ±	.X' ±	PART NO.:		NAME:	
.XX ±	.XX' ±	APPRO: <i>Sean 09/30/14</i>		TITLE: ASSEMBLY DRAWING	
.XXX ±	.XXX' ±	CHKD: <i>Aaron 11/24/14</i>		DRAWING NO.: 8EDG-STDBM-5.0-E01	
ANGLES ± 1°		DRFT: GYZ 08/14/14		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SCALE: N/A		SHEET: 1/1	

active