
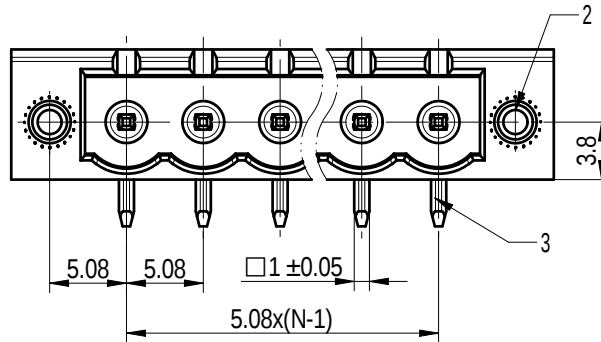
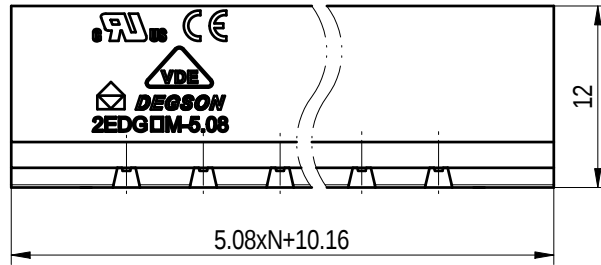
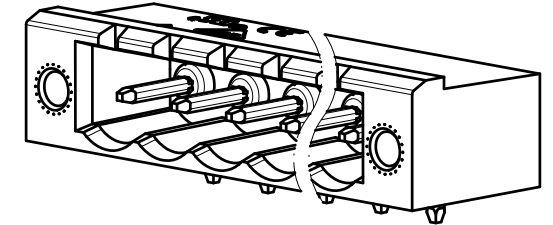


未注公差/General tolerances (mm)															0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500		
3	6	10	18	30	50	80	120	180	250	315	400	500	>500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		±2°

PCB LAYOUT

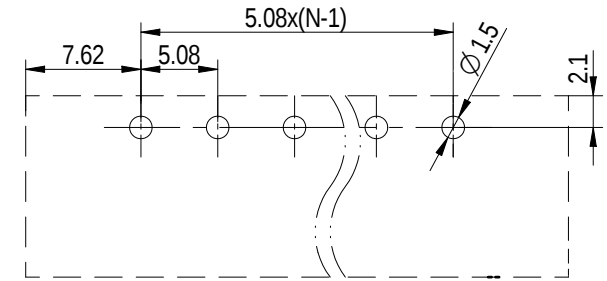

Note:

The A&Z(H) in the name means:A(H) and Z(H).

3	Pin	Copper	Sn Plated
2	Nut	Copper alloy	/
1	Housing	Pa66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4	/
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~22P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		



APPD:	兰春华	2022.07.14
CHKD:	龚耀志	2022.07.13

DRFT:	周锡锦	2022.07.13
-------	-----	------------

MATERIAL:	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量

NAME	2EDGRM-5.08-XXP-1Y-100A&Z(H)
------	------------------------------

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200083441	CUSTOMER DRAWING	已发布	2:1	1/1

00			周锡锦	2022.07.13
REV	ECN	DESCRIPTION	DRFT	DATE