



Notes:

1. Rated voltage: 300V
2. Rated current: 10A
3. Insulation resistance: 5000MΩ/DC1000V
4. Withstanding voltage: AC1500V/1min
5. Temp. Range: -40° C~+105° C
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 6	over 30	over 90	over 200	⌒
to 6	to 10	to 24	to 6	to 30	to 90	to 200	to 480	▱
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		PA66+25%GF代替PBT料	Hooyh	05/10/11
△		PA66+10%GF代替PA66+25%GF	WF	08/12/08
△	12-0139	修改针头部尺寸	ZMT	07/07/12

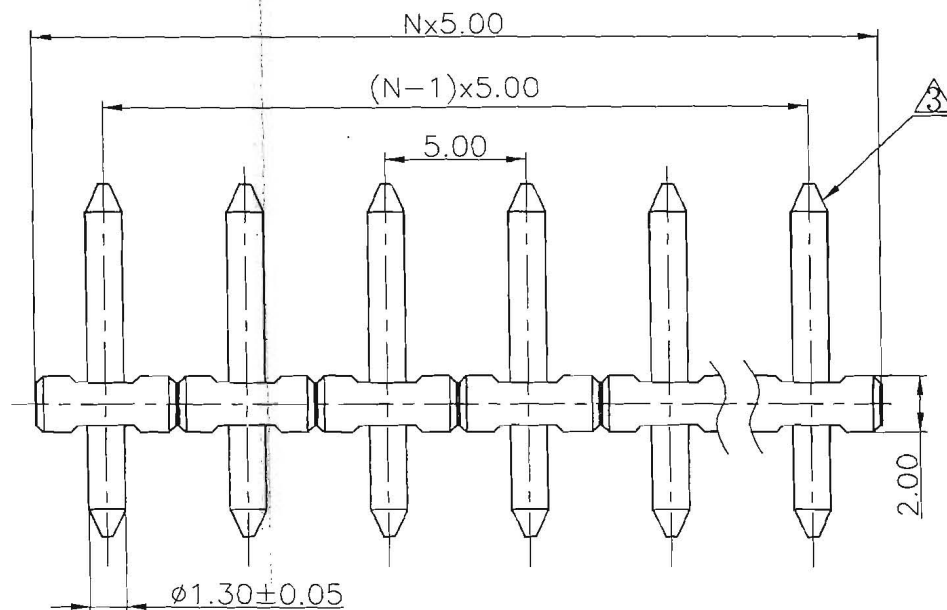

2	DG332-Pin header	4014B00010 (H)	XX	Brass	SnCe
1	DG332J-5.0-Housing	4014A0YXXA (H)	1	PA66+10%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ± ± ± ANGLES ± 1°  THIRD ANGLE PROJECTION <td> OFTD Haoyh DATE 05/12/05 CHKD DATE MFO DATE APPRV DATE MATERIAL : G.E : FINISH : SCALE : 1:1 </td> <td>  DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO.,LTD </td> <td colspan="2"> NAME DG332J-5.0-XXP-1Y-00A(H) DRAWING NO. DG332J-5.0-E05 SIZE A3 DO NOT SCALE DRAWING SHEET 1 </td>	OFTD Haoyh DATE 05/12/05 CHKD DATE MFO DATE APPRV DATE MATERIAL : G.E : FINISH : SCALE : 1:1	 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO.,LTD	NAME DG332J-5.0-XXP-1Y-00A(H) DRAWING NO. DG332J-5.0-E05 SIZE A3 DO NOT SCALE DRAWING SHEET 1	
	REV T3 07/07/12 OF 1				